



MTMM-108-07-F-D-350

MTMM-114-05-F-Q-235

MTMM-124-15-T-S-650

MTMM SERIES

(2,00 mm) .0787"

# MODIFIED THROUGH-HOLE HEADER

## SPECIFICATIONS

For complete specifications see [www.samtec.com?MTMM](http://www.samtec.com?MTMM)

**Insulator Material:** Black Liquid Crystal Polymer

**Terminal Material:** Phosphor Bronze

**Plating:** Sn or Au over 50µ" (1,27 µm) Ni

**Operating Temp Range:** -55°C to +105°C with Tin; -55°C to +125°C with Gold

**RoHS Compliant:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes




**Lead-Free Solderable:** Yes

**Lead-Free Solderable:** Yes

Mates with:  
CLT, SQT, SQW, ESQT,  
TLE, SMM, MMS, TCSD

Choice of  
single, double or  
quad row

Specify  
post height in  
(0,13 mm) .005"  
increments

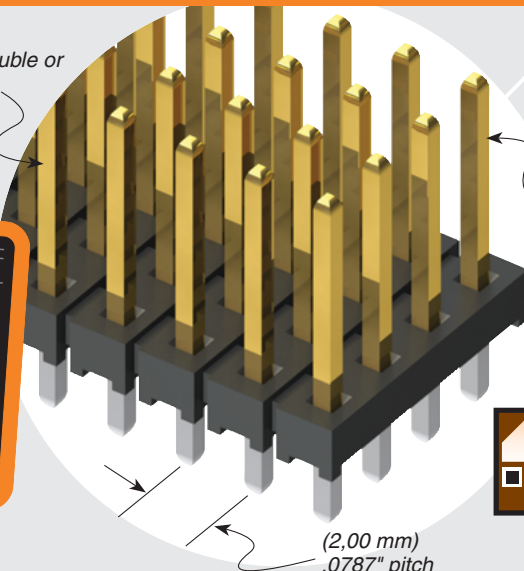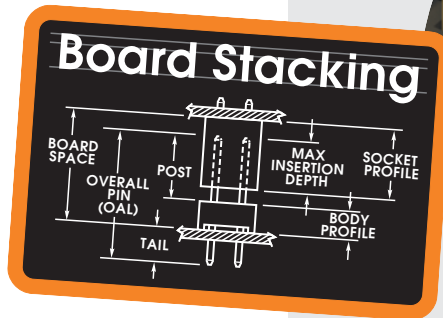

(2,00 mm)  
.0787" pitch

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



01 thru 50


Specify  
LEAD  
STYLE  
from  
chart.

- F = Gold flash on post, Matte Tin on tail
- L = 10µ" (0,25 µm) Gold post, Matte Tin on tail
- T = Matte Tin

- S = Single Row
- D = Double Row
- Q = Quad Row

- "XXX"  
= Post Height in inches (0,13 mm) .005" increments  
Example:  
-070 = (1,78 mm) .070"

- "XXX"  
= Polarized Position  
Specify position of omitted pin

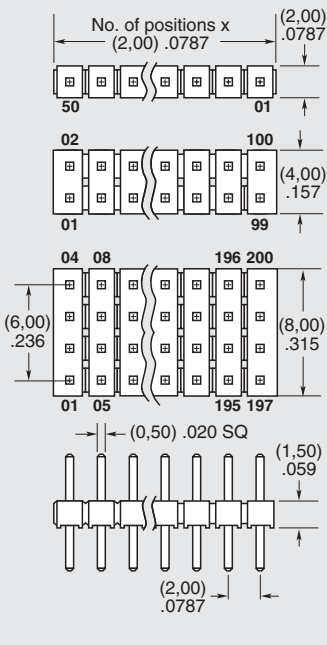

LEAD STYLE	OAL
-02	(6,48) .255
-03	(7,67) .302
-04	(8,20) .323
-05	(9,58) .377
-06	(10,08) .397
-07	(11,58) .456
-08	(12,09) .476
-09	(13,59) .535
-10	(14,10) .555
-11	(15,09) .594
-12	(15,60) .614
-13	(17,09) .673
-14	(19,08) .751
-15	(21,08) .830

Note: This Series is non-standard, non-returnable.