


Part Number: SL05 5R001

### Ordering Different Lead Types:

Inside Kinked Leads	Use <b>-A</b> after Ametherm's part #
Outside Kinked Leads	Not Available

For example: to order an inside kinked lead use part number SL05 5R001-A

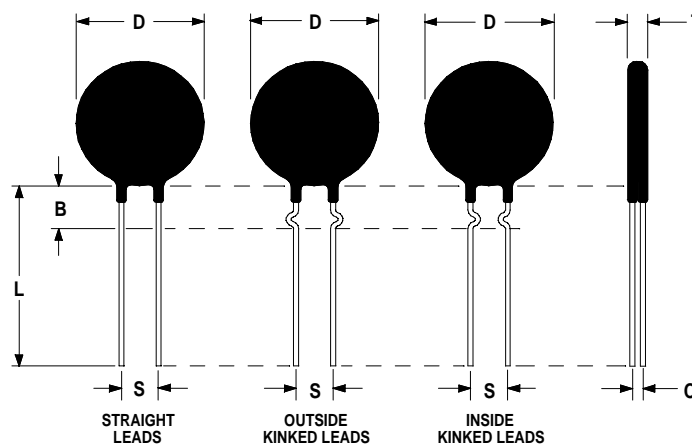

### Electrical Specifications:

Resistance @ 25°C	5.0 Ω ± 25%
Beta	3000 ± 5%
Temp Coefficient of Resistance @ 25°C	128°C
Max Steady State Current Up to 65°C	1.0 A
Resistance @ Max Steady State Current	0.75 Ω
Maximum Instantaneous Energy	5.0 J
Dissipation Constant	5.0mW/°C
Thermal Time Constant	10.0 Seconds
Operating Temperature Range	-50°C/150°C
Material Type	"A"

### Mechanical Specifications:

D	5.6 mm Max
T	3.0 mm Max
Lead Diameter	0.5 mm Nom
S	6.0 mm Nom
L	38.0 mm Min
Straight Leads	Standard

Revision Date: March 3, 2003

**Ametherm, Inc.** 3111 N. Deer Run Road #4 Carson City, NV 89701  
 Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

[www.ametherm.com](http://www.ametherm.com)