


**Mechanical Specifications**

D	12.0 ± 1.0 mm
T	5.0 ± 0.6 mm
Lead Diameter	0.8 mm
S	7.8 mm Nom
L	38.0 mm Min
B	4.5 ± 0.5 mm
Straight Lead	
Lead Material	Tinned Copper
Coating Material	Silicone Resin

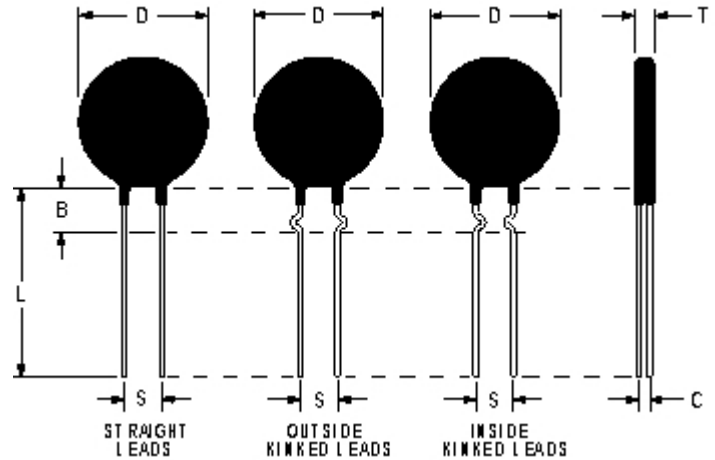

**Electrical Specifications**

Resistance @ 25° C	150.0 Ω ± 30%
Maximum Inrush Current Allowed for 100 cycles only	3.75 Amp
Maximum Switching Current @ 25° C	135 mA Ims
Minimum Continuous Current @ 25° C	70 mA Ims
Switching time @ Max Voltage	Less Than 400 milisec
Max Voltage Rating	440.0 V DC
Residual Current @ Max Voltage	7.0 mA
Switch Temperature	117°C
Dissipation Constant	13.0 mW/°C
Thermal Time Constant	40 sec
Operating Temperature Range	-40°C/125°C

Rev Date: April 28, 2005

**Ametherm Inc, 3111 North Deer Run Road Suite #4 Carson City, NV 89701**

Telephone: (800) 808 2434 · (775) 884-2434 · Fax (775) 884-0670

www.Ametherm.com

*Reliability Delivered On Time*