AMETHERM

Reliability Delivered On Time

P/N:CL12 250120

Mechanical Specifications

D	12.0 mm Max
T	5.0 mm Max
Lead Diameter	0.6 mm Nom
S	6.4 mm Nom
L	38.0 mm Min
Straight Leads	Standard

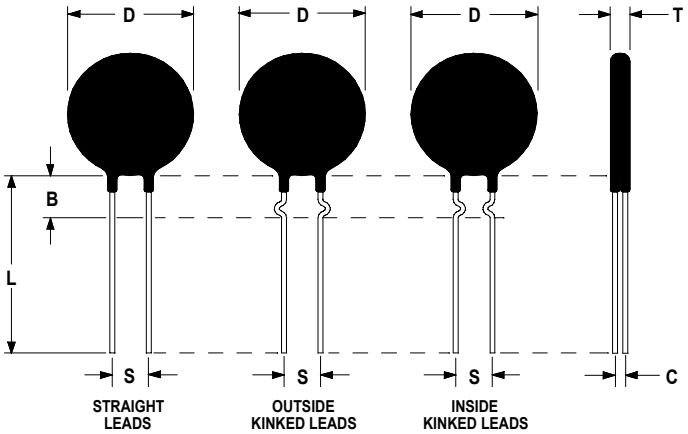

Electrical Specifications

Resistance @ 25°c	25 Ω ± 30%
Transition Temp	120 Deg C
Max voltage Rating	265 v rms
Switch Current @ 50°C	0.25A
Max Inrush current	2.00A
Max Continuos Current @ 0 °c	0.15A

Ametherm, Inc
3111 N. Deer Run Road Bldg. 4
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775-884-0670
www.Ametherm.com

Reliability Delivered On Time