


NOTES:

1. NTC THERMISTOR 1 KILO OHM STD COATING
2. LEADS 24 AWG SOLID 6" LONG WITH TEFLON INSULATION
3. END CONFIGURATION .25 STRIP

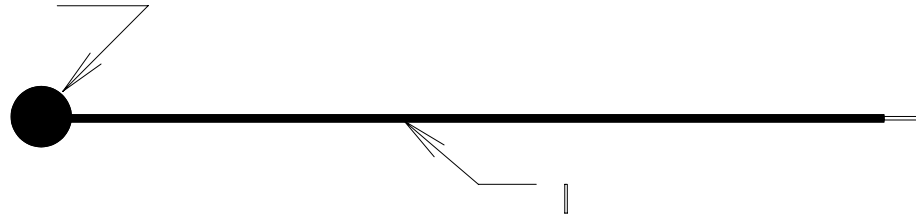

**AMETHERM**

*Reliability Delivered On Time*

		PAN 03	
TMCG 1/31/03	NA		1 OF 1