


Notes:

1. pitch:3.81mm poles:2-24p
2. Rated voltage/current:UL 300V/8A  
VDE 250V/12A
4. Insulation Resistance:5000MΩ/DC1000V
5. Rated impulse voltage:AC2500V
6. Wire range:28-16AWG 0.2-1.5mm<sup>2</sup>
7. Temp. Range:-40° C~+105° C
8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		增加UL刻字	CSX	02/25/08
△		图面整理	hyq	01/21/10
△	10-0164	增加卡点管控	HD	06/01/10
△	10-0254	变更利改外形	HD	06/28/10
△	10-0361	增加VDE刻字及修改参数	ZXX	10/25/10
△	12-0065	修改按钮材质,由PA66改为POM	CHEN	04/09/12
△	13-0244	更改电气参数	Frederik	11/13/13

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to		
6	10	10	30	60	100	150	∩	
6	10	24	30	60	100	150	□	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

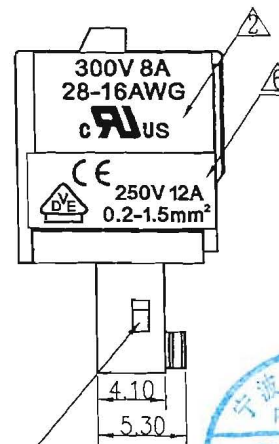

注:2-6P带卡点,7-24P,不带卡点



5	15EDGKD spring	X000001310 (H)	XX	stainless steel	
4	15EDGKD PIN	1088B00010 (H)	XX	phosphor bronze	Snce plated
3	15EDGKD BUTTON	1088D0501A (H)	XX	POM	UL94HB
2	15EDGKD-3.81-COVER	1088C0YXXA (H)	1	PA66	UL94V-0

1	15EDGKD-3.81-HOUSING	1088A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO 2hump	DATE 05/31/07	NAME	
	TOLERANCES EXCEPT AS NOTED	CHKD Alan	DATE 07/8/10	15EDGKD-3.81-XXP-1Y-00A(H)	
	MM	MFO	DATE 7/8/13	DRAWING NO. 15EDGKD-3.81-E01	
	.0 ±	APPLY Alex	DATE	/PART NO.	
.00 ±			MATERIAL :		
.000 ±			G.E. :		
ANGLES ± °			FINISH :		
THIRD ANGLE PROJECTION			SCALE :		
DO NOT SCALE DRAWING			SHEET 1	OF 1	