

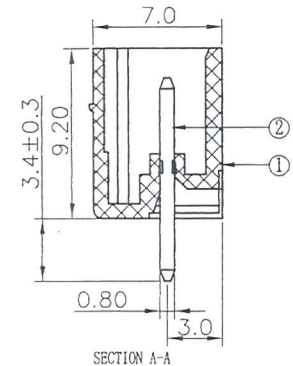


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing emend	WFF	05/07/06
△		去掉UL中的小“R”字	CSX	09/17/07
△		更新图面	LJH	03/01/08
△		老模新开更改刻字	WLM	07/12/08
△		增加自动化方针	WLM	10/31/08
△		增加VDE, CE刻字及修改刻字	Zengy	12/26/08
△		工程变更2-6P取消卡槽	XGF	04/11/09

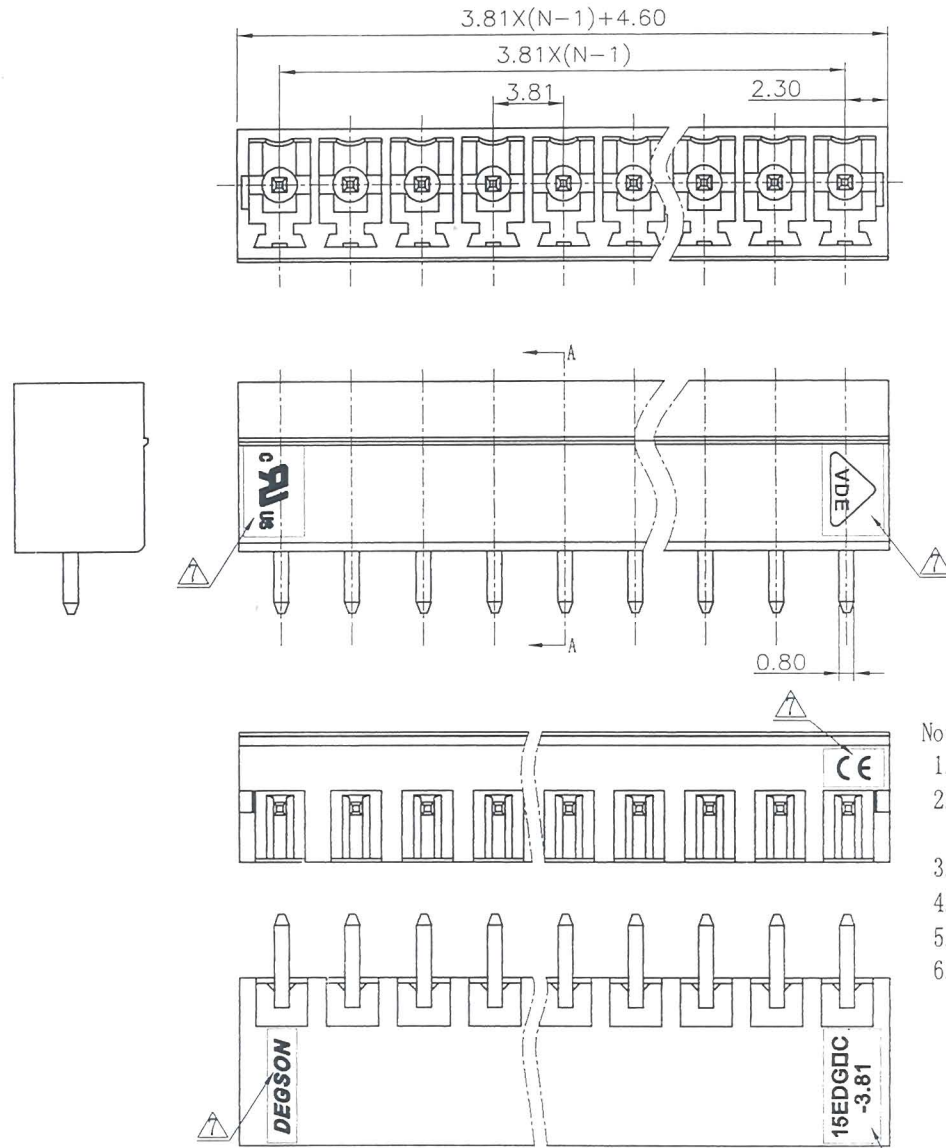

- Notes:
- Pitch: 3.81mm, Poles: 2-24P
  - Rated voltage/current: UL 300V/8A  
VDE 250V/7A
  - Operation temperatures: -40°C ~ +105°C
  - Withstanding Voltage: AC2000V/1min
  - Insulation Resistance: 5000MΩ / DC1000V
  - Undimensioned Tolerances:



Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	over	over	over		
6	10	10	30	60	100	150	∩	
	24	30	60	100	150		□	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

2	15EDGVC-Pin header	△ 1002B00060 (H)	XX	Brass	Automatic assembly
2	15EDGVC-Pin header	1002B00010 (H)	XX	Brass	Manual assembly

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	15EDGVC-3.81-Housing	1003A0YXXA (H)	1	PA66	UL94V-0
TOLERANCES EXCEPT AS NOTED		DFTO Zhuwm DATE 07/24/04			
MM (INCH)		CHKD DATE			
MM		MFO DATE			
.0 ±		APPLV DATE 4/11/09			
.00 ±		MATERIAL :			
.000 ±		G.E :			
ANGLES ± 1°		FINISH :			
THIRD ANGLE PROJECTION		SCALE : 1:1			
		DO NOT SCALE DRAWING		SHEET 1 OF 1	

宁波高正电子有限公司  
 DEGSON ELECTRONICS CO., LTD  
 NAME: 15EDGVC-3.81-XXP-1Y-00A(H)  
 DRAWING NO. 15EDGVC-3.81-E03 SIZE REV T8  
 /PART NO. A3 04/11/09