



2.54mm Wafer DIP Type

Specifications
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Terminal: Brass / Tin Plated
 Material: Nylon 66,UL94V0

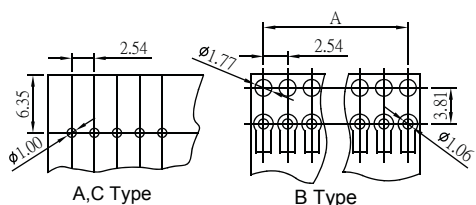


Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

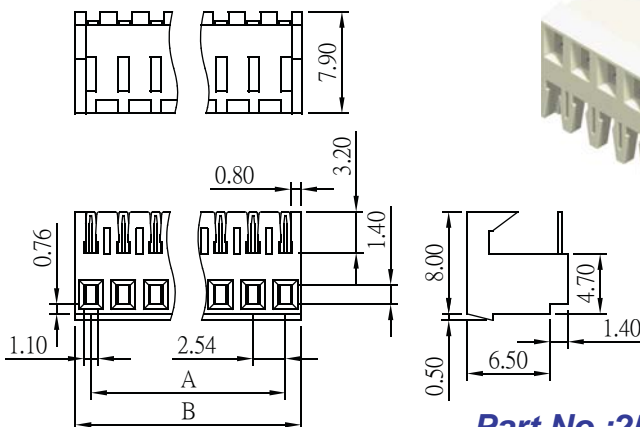


Part No.:2548A-XX-L

No. of Contacts	Dimensions	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50

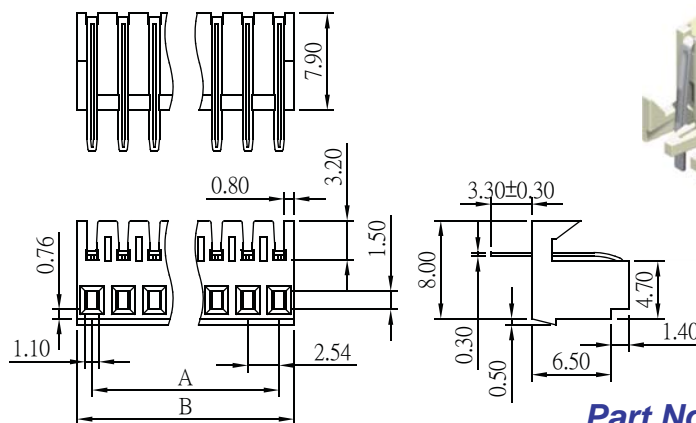

Part No.:2548B-XX-L

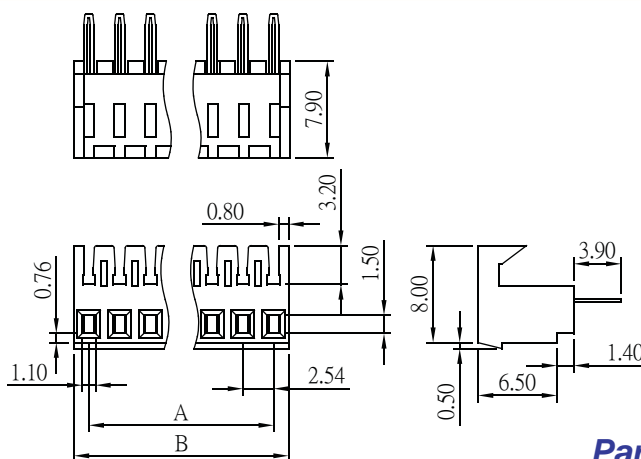

Part No.:2548C-XX-L

ORDER INFORMATION

2 5 4 8 X - X X

A:A Type
 B:B Type
 C:C Type

No. of contacts per row
 (02~25)

©T: Tin Plated
 G: Gold Flash S: Selective
 GA: 5u" SA: 5u"
 GB: 10u" SB: 10u"
 GC: 20u" SC: 20u"
 GD: 30u" SD: 30u"

W: Nylon natural

L: RoHS + Nylon 66

©: Standard Recommend