

SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105 °C




MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P H 1 R D A 1 5 - 1 X X X X N N X U - A B C - 0 0

1: Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS+Hi-Temp. X: Box B: Bag C: Tube With Cap	EX: 060030039 A: 6.0 B: 3.0 C: 3.9
---------------	--------------------------------	--	--	---------------------------	--	---

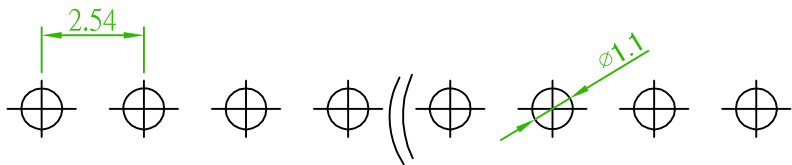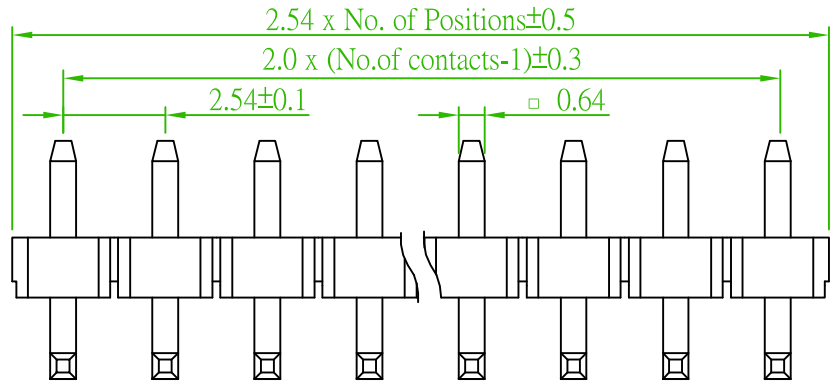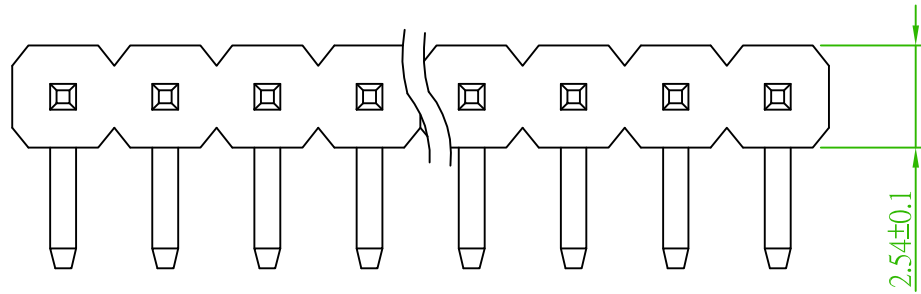

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. : PH1RD15-1XX-U

REV.	Modify order information	B	2017/01/24 Gary
	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm S/R R/A DIP TYPE			頁數 Page	1/1
品號 PART NO.	5PH1RDA15-1XXXXNXXU -XXXXXXXXXX-00		繪圖 DRAWN	Jeff 2016/09/19	
圖號 DRAWING NO.	GN016-GA136	版本 REV.	B	核對 CHECKED	Johnny 2016/09/19
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	