

**SPECIFICATIONS**





Current Rating: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40 °C to +105 °C

**MATERIAL**

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black  
 Contact Pin: Copper Alloy

**ORDER INFORMATION**

5 P H 1 R U A 1 5 - 1 X X X X N N X U - A B C - 0 0

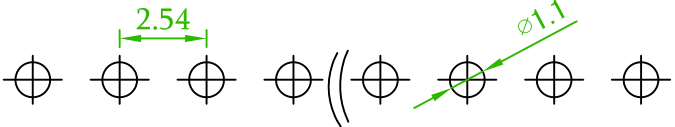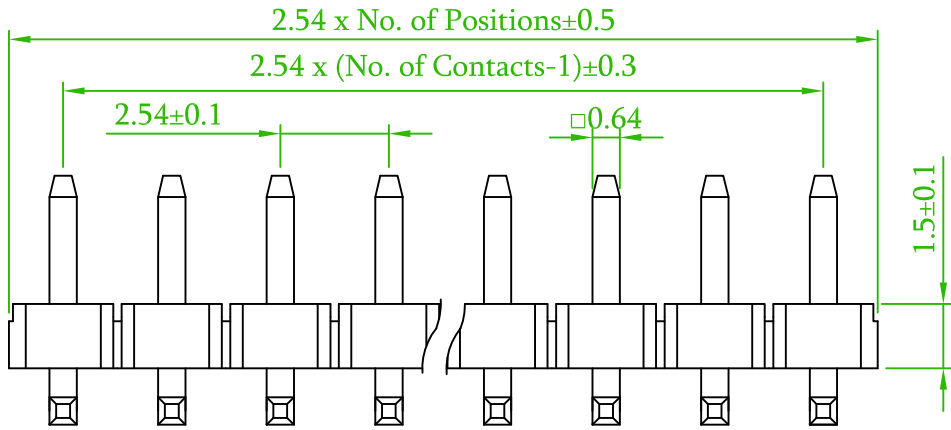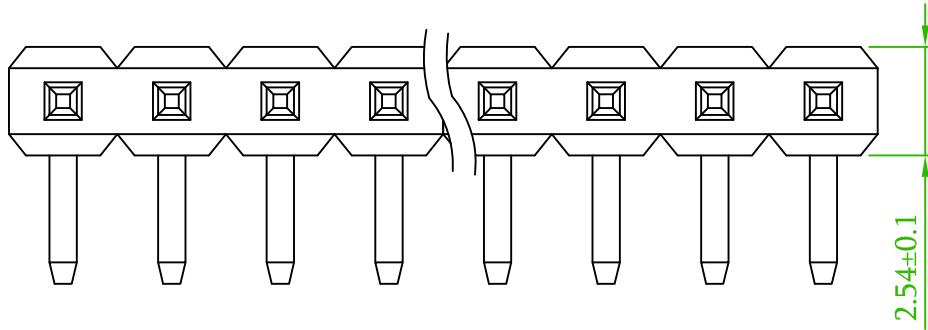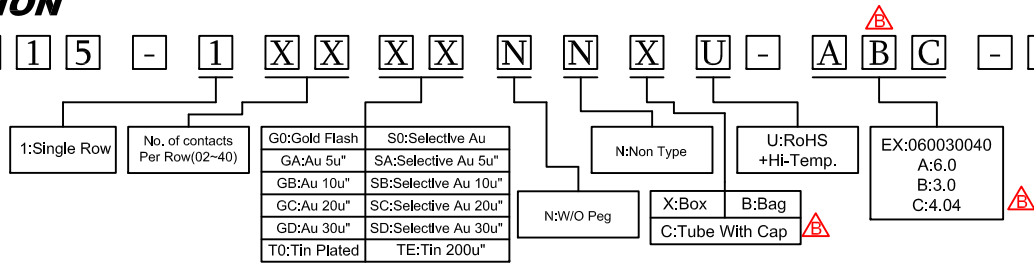

Recommended PCB Layout  
 (PCB TOLERANCE ±0.1)

Old Part No. :PH1RU15-1XX-U

△	Modify order information	B	2017/01/25 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm S/R R/A DIP TYPE			頁數 Page	1/1
品號 PART NO.	5PH1RUA15-1XXXXNXU -XXXXXXXXXX-00			繪圖 DRAWN	Mia 2017/01/16
圖號 DRAWING NO.	GN015-MC223	版本 REV.	B	核對 CHECKED	Jonny 2016/01/16
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/01/16
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION