

ORDER INFORMATION





SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

5 P S 1 S D A 8 5 - 2 X X X X N N N X U - 0 0

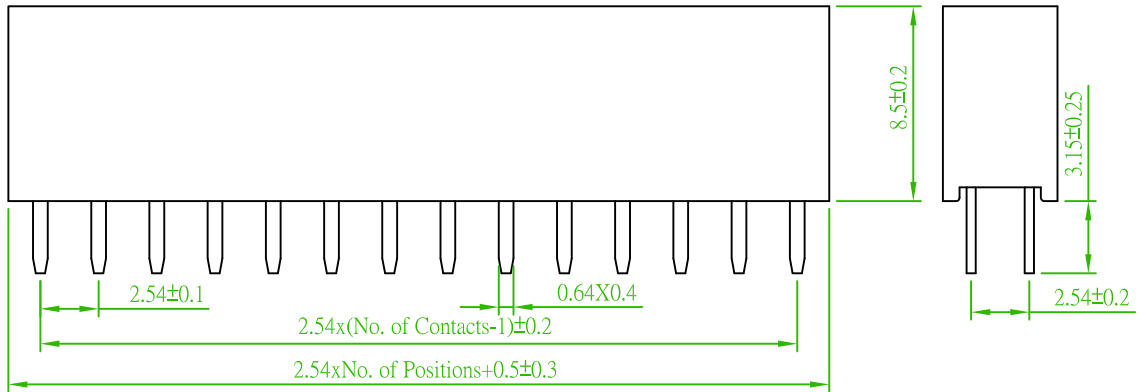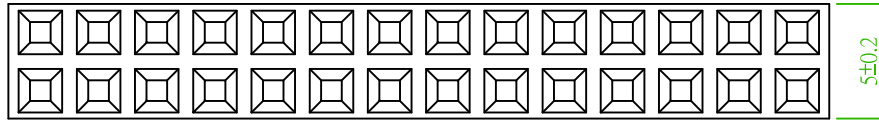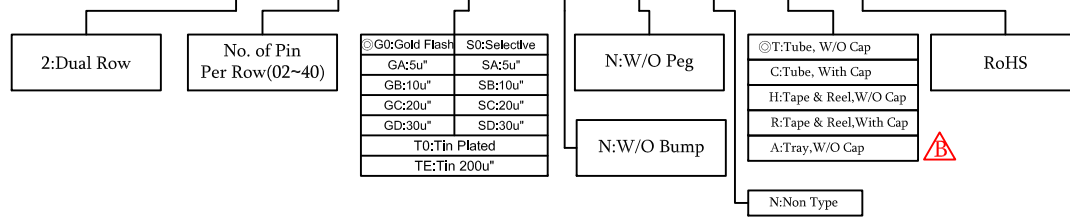

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. : PS1S85-2XX-U

△	Revise the drawing	B	2017/01/20 Roy
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PS1SDA85-2XXXXNNNXU-00				繪圖 DRAWN	Jeff 2015/08/27
圖號 DRAWING NO.	GN003-RL380		版本 REV.	B	核對 CHECKED	John 2015/08/27
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	John 2015/08/27
公差 TOLERANCE	.X ± 0.25	.XX ± 0.20	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION