
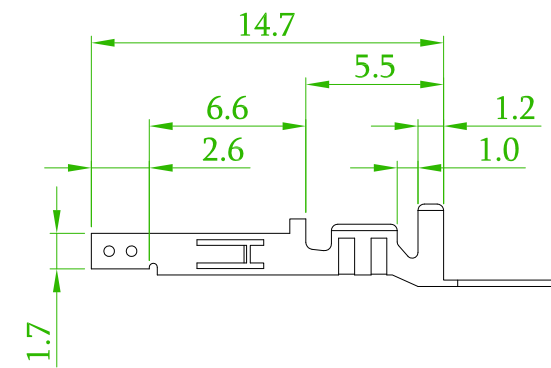
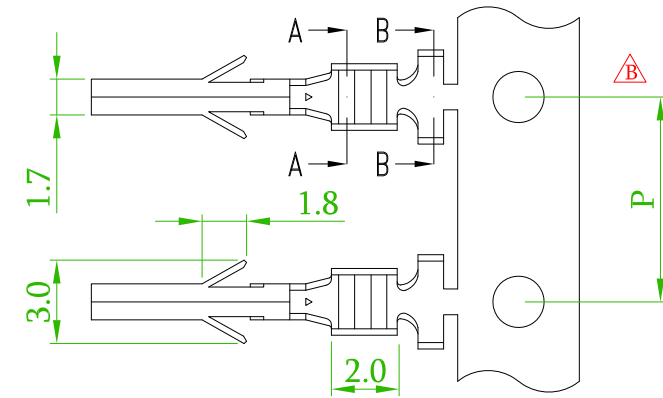
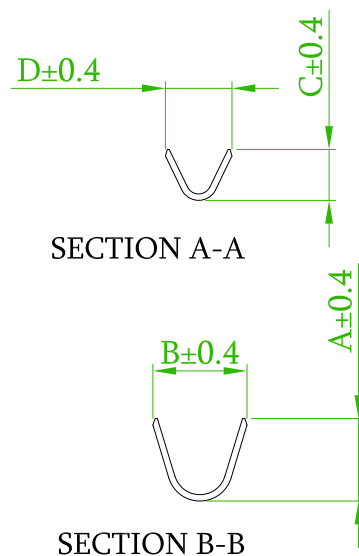
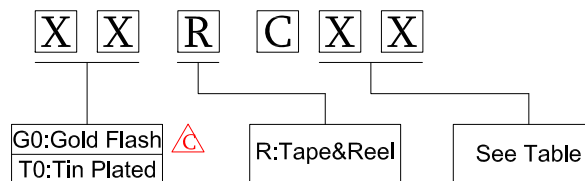


SPECIFICATIONS

Current Rating: Up to 9A (With #18 AWG)
 Dielectric Voltage: 1500V AC for one minute
 Contact Resistance: 10mΩ Max.
 Operation Temperature: -40°C to 105°C
 Thickness: 0.2 mm

ORDER INFORMATION

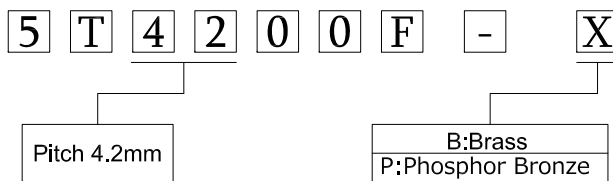

Part No.	Dimensions $\triangle B$					Wire Size (AWG)
	A	B	C	D	P	
5T4200F-XXXRC02	2.3	2.3	1.65	1.8	9.5	#22 ~ #28
5T4200F-XXXRC01	4.5	3.6	2.3	1.9	11.0	#18 ~ #24
5T4200F-XXXRC03			2.8	2.4	11.0	#16

Old Part No.:4200-FT-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
$\triangle C$ x1	Add a plating: G0: Gold Flash.	Gary	2018/03/26
$\triangle B$ x2	Add the dim. P.	Gary	2018/02/07

耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	4.2mm TERMINAL				頁數 Page	1/1
品號 PART NO.	5T4200F-XXXRCXX				繪圖 DRAWN	Jeff 2016/08/08
圖號 DRAWING NO.	GW083-GA984	版本 REV.	C	核對 CHECKED	Josh 2018/03/26	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/26	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		