


SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 500V AC/minute


MATERIAL

Terminal: Copper Alloy
 Material: Nylon 6T,UL94V-0


ORDER INFORMATION

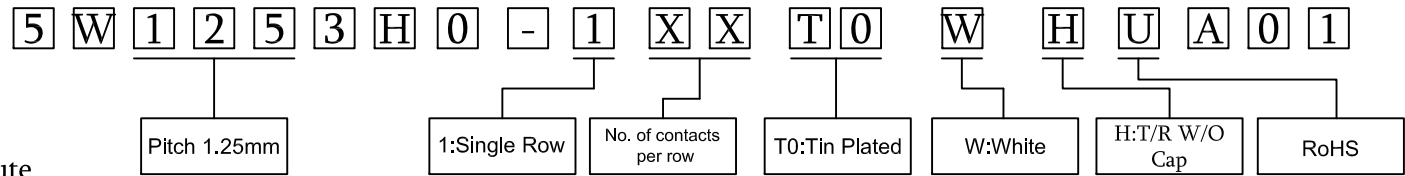



No. of contacts	Dimensions		No. of contacts	Dimensions	
	A	B		A	B
02	1.25	7.45	11	12.50	18.70
03	2.50	8.70	12	13.75	19.95
04	3.75	9.95	13	15.00	21.20
05	5.00	11.20	14	16.25	22.45
06	6.25	12.45	15	17.50	23.70
07	7.50	13.70	20	23.75	29.95
08	8.75	14.95	21	25.00	31.20
09	10.00	16.20	25	30.00	36.20
10	11.25	17.45	30	36.25	42.45




02P

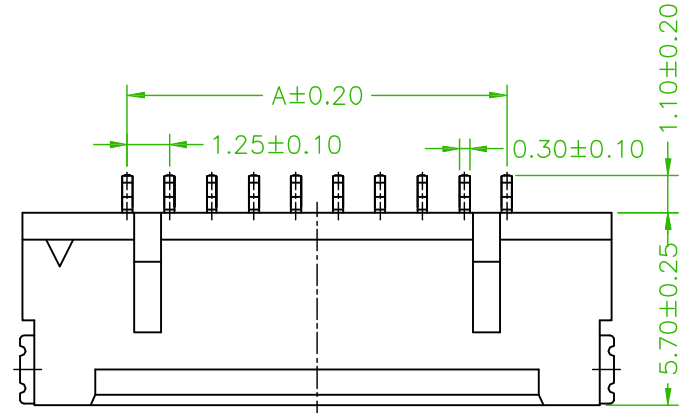


04P~30P

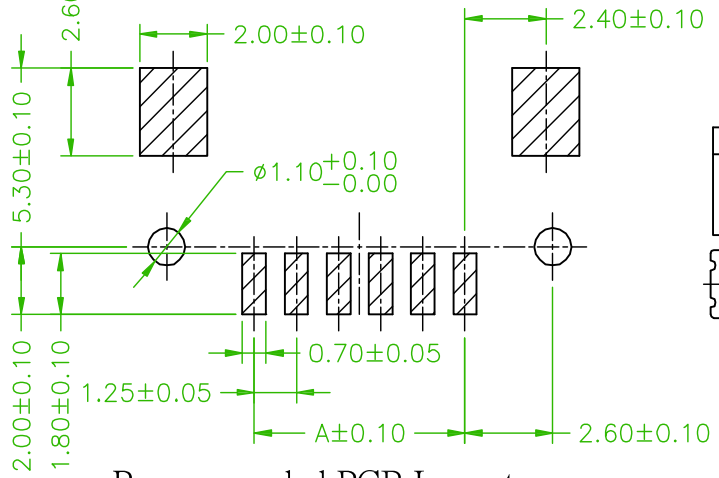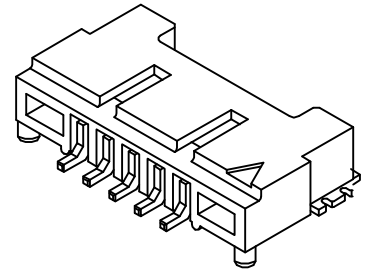

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)



03P

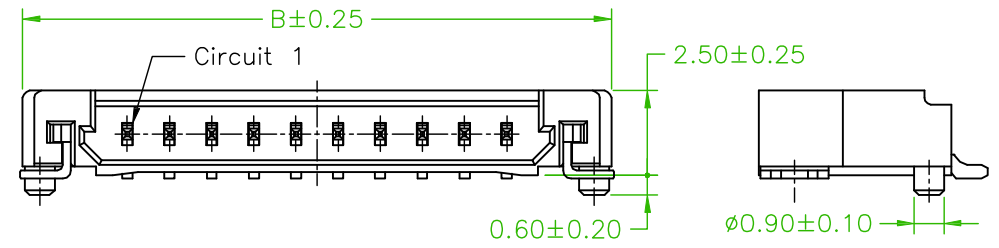

Old Part No.:1253MR-XXTW-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm WAFER SMT R/A			頁數 Page	1/1
	品號 PART NO.	5W1253H0-1XXT0WHUA01			繪圖 DRAWN	Kent 2006/05/11
	圖號 DRAWING NO.	GW090-EL053	版本 REV.	A	核對 CHECKED	Paul 2006/05/11
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/05/11
	公差 TOLERANCE	.X ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	
		.XX ± 0.10				