


### SPECIFICATIONS

Current Rating: 7A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -40°C to +105°C  
 Contact Resistance: 10mΩ Max  
 Withstanding Voltage: 1500V AC/minute  
 Insulation resistance:1000mΩ Min  
 After environmental testing:20mΩ Max

### MATERIAL



Insulator:Nylon 66,UL94V-2  
 Contact:Brass

### ORDER INFORMATION

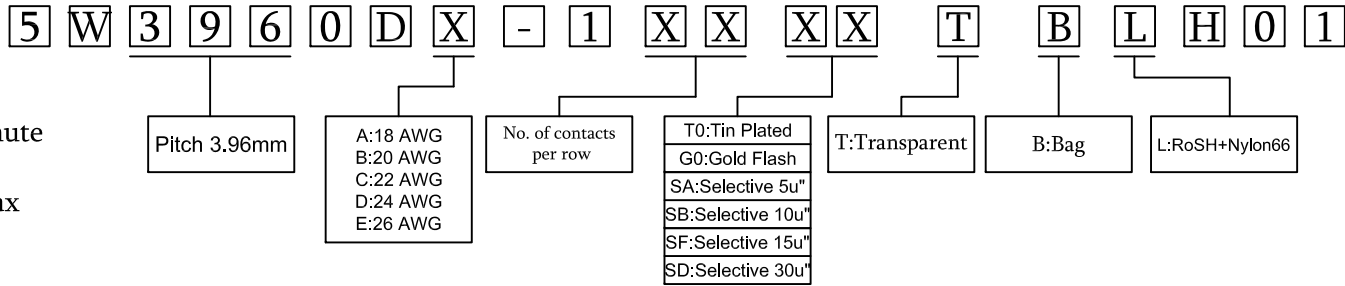

Circuits	DIM.A	DIM.B	Tolerances
02	7.92	3.96	±0.15
03	11.88	7.92	
04	15.84	11.88	
05	19.80	15.84	
06	23.76	19.80	±0.20
07	27.72	23.76	
08	31.68	27.72	
09	35.64	31.68	
10	39.60	35.64	±0.25
11	43.56	39.60	
12	47.52	43.56	
13	51.48	47.52	

Circuits	DIM.A	DIM.B	Tolerances
14	55.44	51.48	±0.25
15	59.40	55.44	
16	63.36	59.40	±0.30
17	67.32	63.36	
18	71.28	67.32	
19	75.24	71.28	
20	79.20	75.24	±0.35
21	83.16	79.20	
22	87.12	83.16	
23	91.08	87.12	
24	95.04	91.08	
25	99.00	95.04	

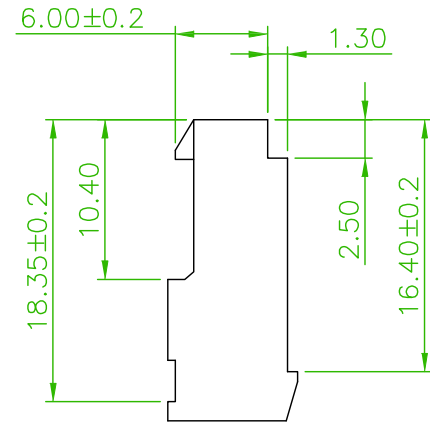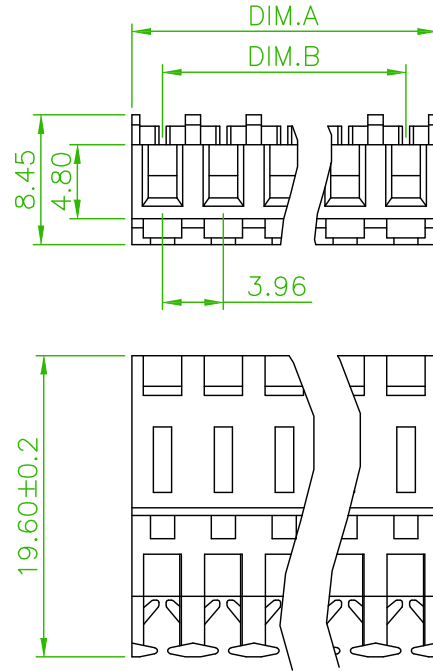

Old Part No.:3960IDC-XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

<p>糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	3.96mm IDC Housing			頁數 Page	1/1
	品號 PART NO.	5W3960DX-1XXXXTBLH01			繪圖 DRAWN	Roy
	圖號 DRAWING NO.	GW021-DV494	版本 REV.	A	核對 CHECKED	Boris
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION	