


Notes:

- 1.100% Test.
- 2.Insulation Resistance:10MΩ
- 3.Contact Resistance:20Ω
- 4.Test Volts:DC 50V
- 5.Red to Yellow Resistance:470K±3%
- 6.Black to Yellow Resistance:470K±3%

Material

- 1.Wire:UL 1007 22# Wire Color:Yellow,Black,Red
- 2.HSG:2510 1\*3P Pitch2.54mm HSG Brown
- 3.Terminal:2510 Tin Plated
- 4.Wire:30# 雙絞銅線+棉線絕緣(客供)
- 5.Tube:φ3.0\*70mm T=0.2mm Heat shrinkable Tube Black
- 6.Tube:φ3.0\*40mm T=0.2mm Heat shrinkable Tube Black
- 7.Resistance:470kΩ/1/8W 碳膜電阻 (Tolerance:1%)
- 8.Tube:φ2.0\*40mm T=0.2mm Heat shrinkable Tube Black
- 9.Terminal:接線端子
- 10.Tube:φ2.0\*30mm T=0.2mm Heat shrinkable Tube Black
- ① 11.Label
- 12.Tube:φ4.0\*35mm T=0.2mm Heat shrinkable Tube Transparent

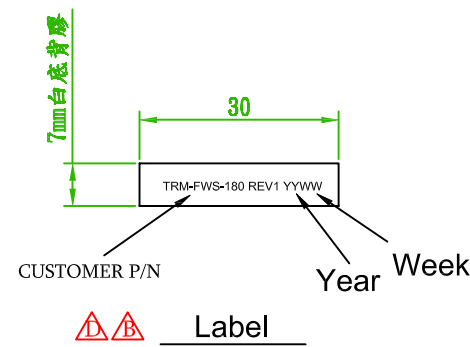

包裝方式：  
單PCS包裝再裝入 438\*413\*241MM的  
紙箱內，裝箱數量自定。

△x2	Revise the Label	Roy	2017/10/23
△x1	Revise the Label	Roy	2017/10/03
△x2	Add the Label	Roy	2017/09/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司  
Amtek Technology Co., Ltd.  
TEL: 886-2-2260-6878  
FAX: 886-2-2260-8030

品名 TITLE	WIRE HARNESS				頁數 Page	1/1
品號 PART NO.	61WHN-01572				繪圖 DRAWN	Roy 2017/09/06
圖號 DRAWING NO.	GW042-RL991	版本 REV.	D	核對 CHECKED	Carol 2017/09/06	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/09/06	
公差 TOLERANCE	± 0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		