


Mechanical Specifications

D	10.0mm ±0.5mm
T	5.5mm Max
Lead Diameter	0.6mm ±0.03mm
S	7.0mm ±1.0mm
L	17.0mm Min
B	8.0mm ±2.0mm
C	1.2mm Nom

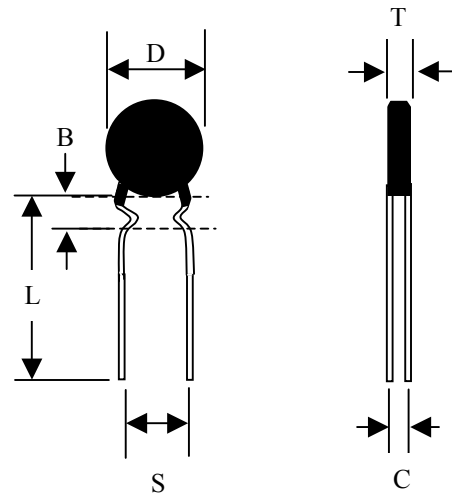

Electrical Specifications

Resistance @ 25°C	10Ω ±20%
Max Steady State Current Up to 65°C	2 Amps
Max recommended energy rating (Joules)	8 Joules
Actual failure point of instantaneous energy (Joules)	16 Joules
Resistance @ 100% of Max Current	0.458Ω
Resistance @ 50% of Max Current	0.800Ω
Body Temperature @ 100% Current rating	155°C
Dissipation Constant	11 mW / °C
Thermal Time Constant	32 Seconds
Material Type	B

Ametherm, Inc
961 Fairview Drive
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775 884-0670
www.Ametherm.com