


Mechanical Specifications

D	15.0 mm Max
T	5.0 mm Max
Lead Diameter	0.8 mm \pm 0.05mm
S	10.0 mm \pm 1.5mm
L	38.0 mm Nom
C	3.0 mm \pm 0.5mm
Straight Leads Coating Rundown	5.0mm Max

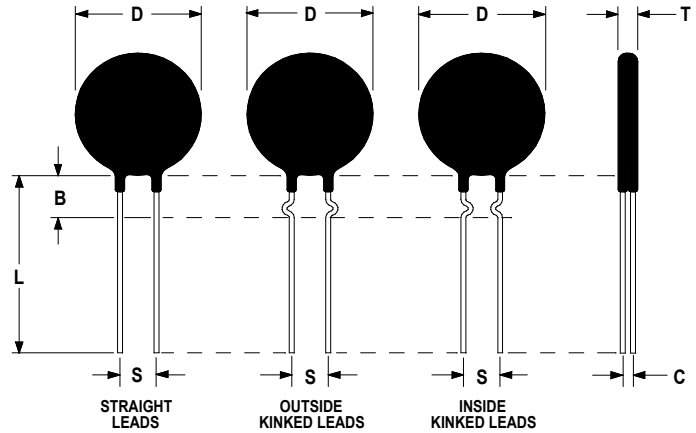

Electrical Specifications

Resistance @ 25°C	3Ω \pm 20%
Max Steady State Current	7.0 A
Max Recommended Energy	60 J
Actual Failure Point of Instantaneous Energy	110 J
Max Capacitance @ 120VAC	8,333 μF
Max Capacitance @ 240 VAC	2,083 μF
Max Capacitance @ 480 VAC	520 μF
Resistance @ 25% of Max Current	0.571 Ω
Resistance @ 50% of Max Current	0.233 Ω
Resistance @ 75% of Max Current	0.135 Ω
Resistance @ 100% of Max Current	0.091 Ω
Dissipation Constant	19 mW / °C
Thermal Time Constant	75 Seconds