

## Pin Header 2.00mm 1 & 2 & 3 & 4 Row H=1.5/2.0mm Right Angle Type

### Specifications



Current Rate: 2 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material




Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Standard Plating: Gold Flash

◎ : Standard Dimensions




	Dimensions		
	A	B	C
H=1.50mm	3.90	2.80	2.50
H=2.00mm	3.90	2.80	3.00

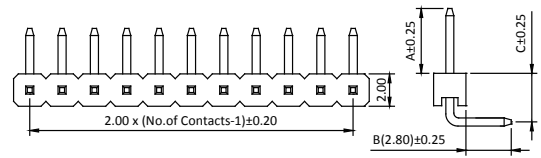




P/N.: 5PH2RDA15/20-1XX

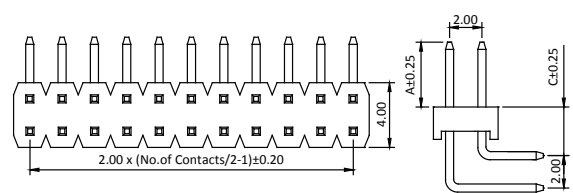


P/N.: 5PH2RDA15/20-2XX

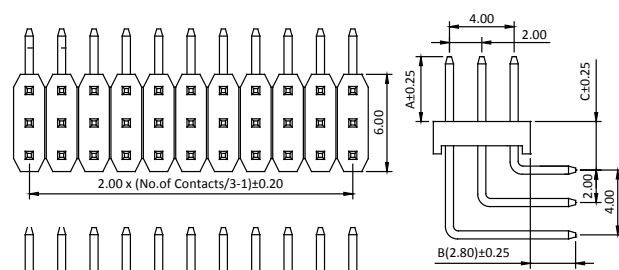

P/N.: 5PH2RDA15/20-3XX

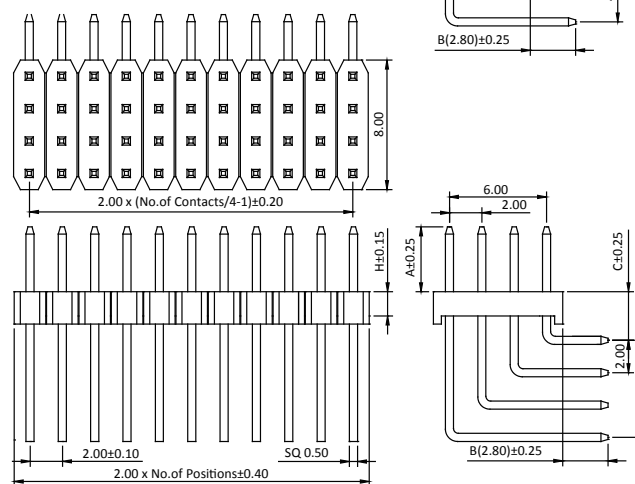

P/N.: 5PH2RDA15/20-4XX



## ORDER INFORMATION

5 P H 2 R D A X X - X X X X N N B X - A/B/C

- RD : Single Plastic RA DIP
- Plastic Height: 15:H=1.5mm, 20:H=2.0mm
- No. of Contact Per Row (02~50)
- N: W/O Peg
- B: BAG
- L: RoHS + PBT, U: RoHS Hi-Temp.
- EX.: 040042030, A: 4.00(040), B: 4.20(042), C: 3.00(030)

1: Single Row	© G0: Gold Flash	S0: Selective
2: Dual Row	GA: Gold 5u"	SA: Selective 5u"
3: Triple Row	GB: Gold 10u"	SB: Selective 10u"
4: Quad Row	GC: Gold 20u"	SC: Selective 20u"
	GD: Gold 30u"	SD: Selective 30u"
	T0: Tin Plated	
	TE: Tin 200u"	

◎ : Standard Recommend  
 Tube package is not available for under 1\*5 & 2\*5 pin counts

Old P/N: PH2R15/20-1/2/3/4