




Pin Header 2.0mm 1 & 2 Row H=1.5/2.0mm Stack Straight Type

Specifications


Current Rate: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Standard Plating: Gold Flash

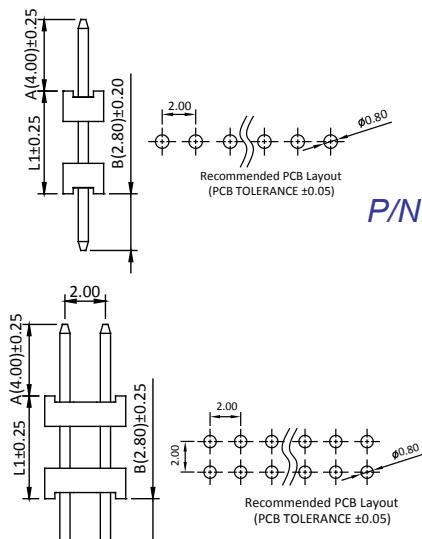
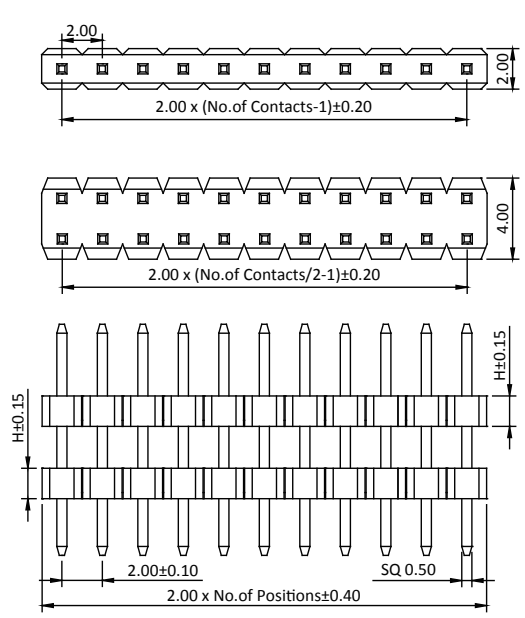


P/N.: 5PH2DDA15/20-1XX




P/N.: 5PH2DDA15/20-2XX

Pin Header 2.0mm 2 Row H=4.0mm Right Angle / Straight Type

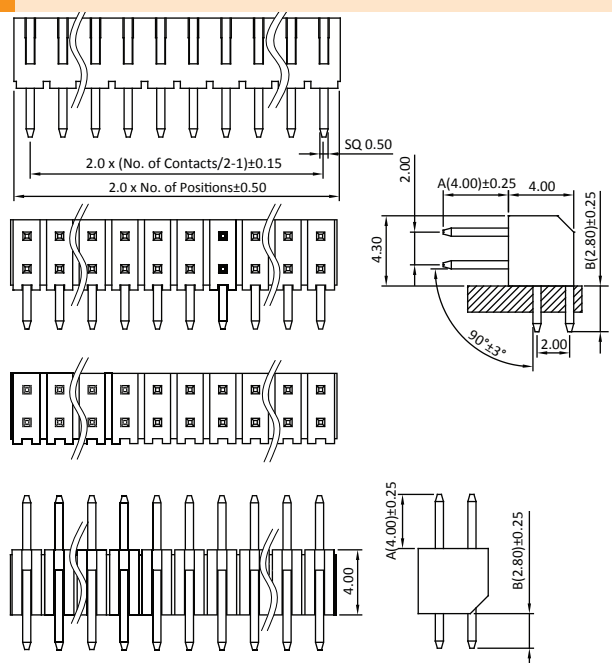

P/N.: 5PH2RDA40-2XX



P/N.: 5PH2SDA40-2XX

ORDER INFORMATION

5	P	H	2	X	X	A	X	X	-	X	X	X	X	N	N	B	X	-	A/L1/B	A/B
				Plastic Height 15:H=1.5mm 20:H=2.0mm 40:H=4.0mm				No. of Contact Per Row (02~50) H: 1.5mm Per Row (02~40) H: 2.0mm/4.0mm				N: W/O Peg		B: Bag		EX.: 040028000 A: 4.00(040) B: 2.80(028) A/B For 5PH2SD/RUAXX-2XX A/L1/B For 5PH2DDAXX-1/2XX				
DD : Stack Plastic Dip RD : Single Plastic R/A Dip SD : Single Plastic Dip				1: Single Row 2: Dual Row				◎G0: Gold Flash S0: Selective GA: Gold 5u" SA: Selective 5u" GB: Gold 10u" SB: Selective 10u" GC: Gold 20u" SC: Selective 20u" GD: Gold 30u" SD: Selective 30u" T0: Tin Plated TE: Tin 200u"				L: RoHS + PBT U: RoHS Hi-Temp		Old P/N: PH2D15/20-1/2 PH2R/S40-1						

◎: Standard Recommend
 Tube package is not available for under 1*5 & 2*5 pin counts