



## Female Header 2.54mm 1 & 2 & 3 Row H=8.5mm Y Contact Straight Type

### Specifications





Current Rate: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material

Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Standard Plating: Gold Flash

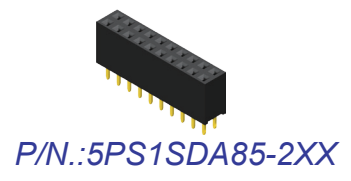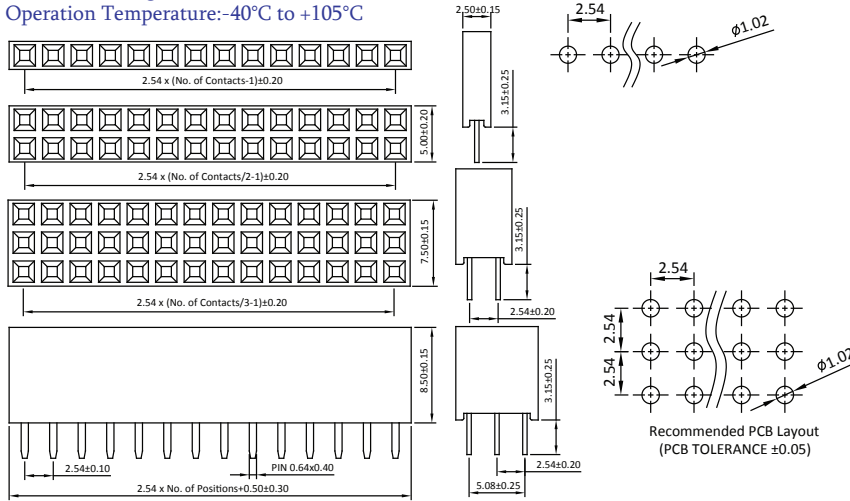

## Female Header 2.54mm 2 Row H=8.5mm With Bump Straight Type

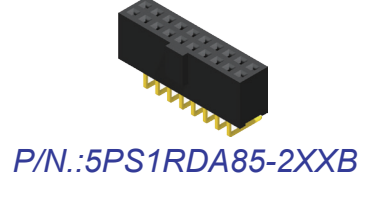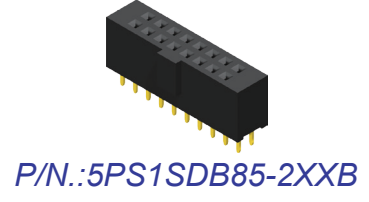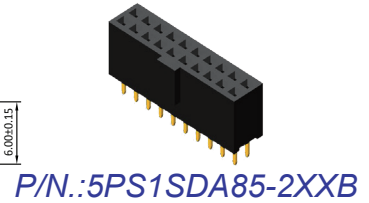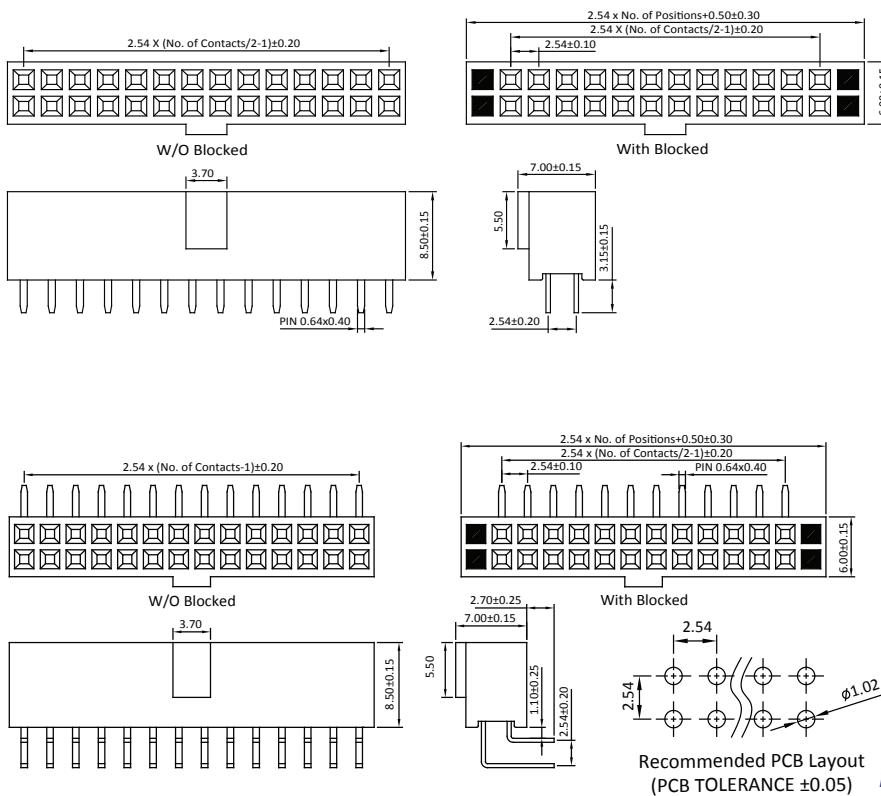

## ORDER INFORMATION

5	P	S	1	X	X	X	8	5	-	X	X	X	X	X	X	N	N	X	X				
SD: Straight DIP RD: R/A DIP					Plastic Height 85: H=8.5mm					No. of Contact Per Row (02~40)					N: W/O Bump B: With Bump					N: W/O Peg		U: RoHS Hi-Temp. L: RoHS + PBT	
A: W/O Blocked B: W Blocked					1: Single Row 2: Dual Row 3: Triple Row					◎G0: Gold Flash GA: Gold 5u" GB: Gold 10u" GC: Gold 20u" GD: Gold 30u" T0: Tin Plated TE: Tin 200u"					S0: Selective SA: Selective 5u" SB: Selective 10u" SC: Selective 20u" SD: Selective 30u"					◎ A: Tray, W/O Cap T: Tube, W/O Cap			

◎: Standard Recommend  
 Tube package is not available for under 1\*5 & 2\*5 pin counts

Old P/N: PS1S85-1/2/3  
 PS1S85B-2  
 PS1R85B-2