

SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66, UL94V-0
 Color: Black

ORDER INFORMATION

2 2 1 1 H - 2 X X B - L

◎: Standard Recommend


No. of contacts per row
(02-20)

Black Insulator

Le:RoHS + Nylon 66



PART NO.	Dimensions	
	A	B
2211H-202B-L	2.00	6.00
2211H-203B-L	4.00	8.00
2211H-204B-L	6.00	10.00
2211H-205B-L	8.00	12.00
2211H-206B-L	10.00	14.00
2211H-207B-L	12.00	16.00
2211H-208B-L	14.00	18.00
2211H-209B-L	16.00	20.00
2211H-210B-L	18.00	22.00
2211H-211B-L	20.00	24.00
2211H-212B-L	22.00	26.00
2211H-213B-L	24.00	28.00
2211H-214B-L	26.00	30.00
2211H-215B-L	28.00	32.00
2211H-216B-L	30.00	34.00
2211H-217B-L	32.00	36.00
2211H-218B-L	34.00	38.00
2211H-219B-L	36.00	40.00
2211H-220B-L	38.00	42.00

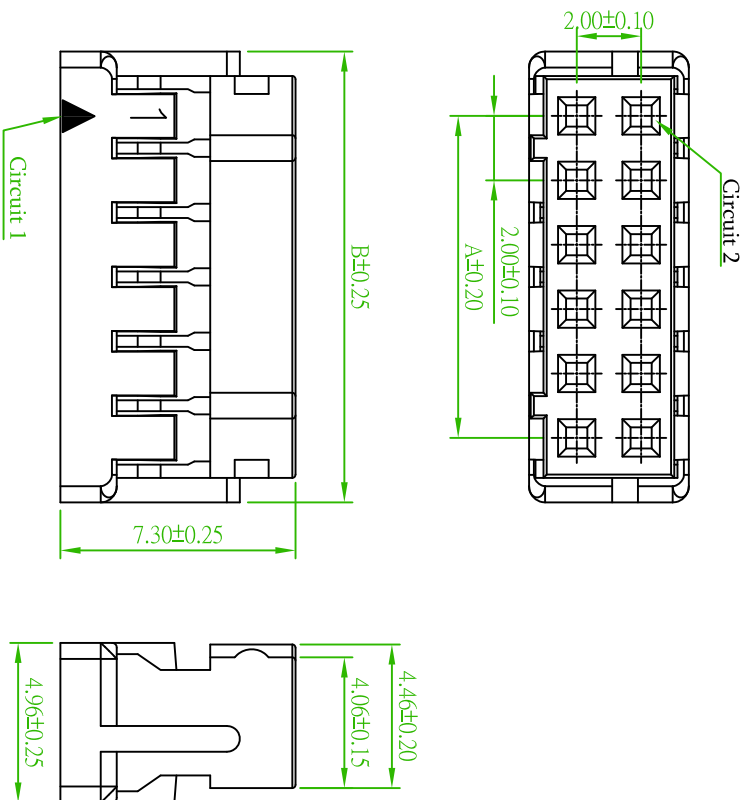

<p>Amitek Technology Co., Ltd. 耀德企業有限公司 TEL: 86-2-2268-8035 FAX: 86-2-2268-8035</p>		品名 TITLE 2.0mm HOUSING	
品號 PART NO. 2211H-2XXB-L		日期 DATE 11/16/2007	
圖號 DRAWING NO. 2211H-2XXB-L		繪圖 DRAWN Kent	
客戶品號 CUSTOMER P/N X ±0.25 .XX ±0.2		版本 REV. B	
公差 TOLERANCE		比例 SCALE FREE	
DATE		單位 UNIT mm	
REV.		核對 CHECKED Paul	
DESCRIPTION		核准 APPROVED James	
AREA		DATE	