




Specifications

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Material: NORYL ,UL94V-1

ORDER INFORMATION

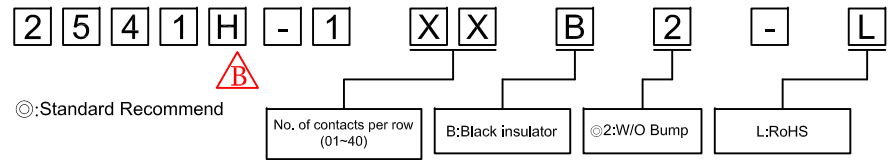

CIRCUITS	DIM. A	DIM. B
1		2.65
2	2.54	5.28
3	5.08	7.82
4	7.62	10.36
5	10.16	12.90
6	12.70	15.44
7	15.24	17.98
8	17.78	20.52
9	20.32	23.06
10	22.86	25.60
11	25.40	28.14
12	27.94	30.68
13	30.48	33.22
14	33.02	35.76
15	35.56	38.30
16	38.10	40.84
17	40.64	43.38
18	43.18	45.92
19	45.72	48.46
20	48.26	51.00
21	50.80	53.54
22	53.34	56.08
23	55.88	58.62
24	58.42	61.16
25	60.96	63.70
26	63.50	66.24
27	66.04	68.78
28	68.58	71.32
29	71.12	73.86
30	73.66	76.40
31	76.20	78.94
32	78.74	81.48
33	81.28	84.02
34	83.82	86.56
35	86.36	89.10
36	88.90	91.64
37	91.44	94.18
38	93.98	96.72
39	96.52	99.26
40	99.06	101.80

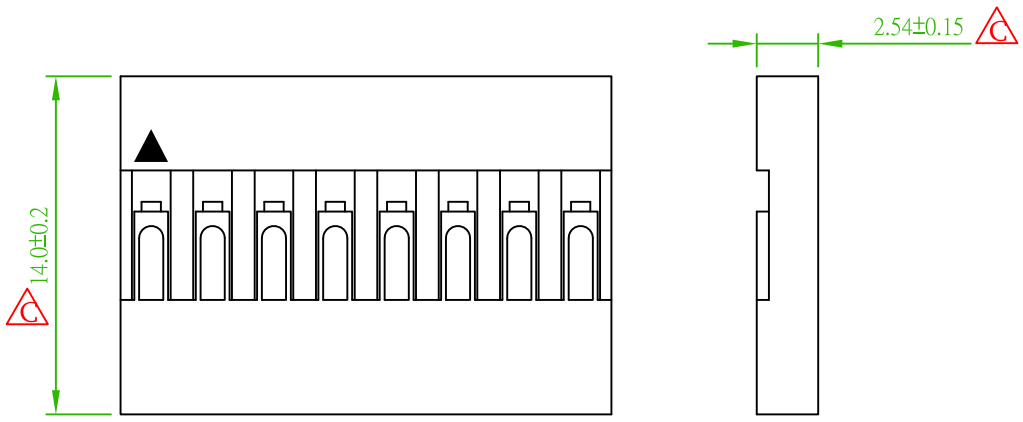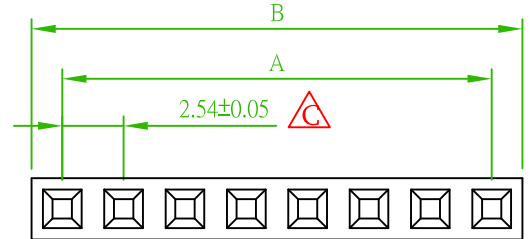

W/O Bump

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL:886-2-2260-6878 FAX:886-2-2260-8030	品名 TITLE	2.54mm HOUSING				
	品號 PART NO.	2541H-1XXB2-L	日期 DATE	02/01/2007		
	圖號 DRAWING NO.	2541H-1XXB2-L	版本 REV.	C	繪圖 DRAWN	Kent
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Paul
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	核准 APPROVED	James

	C	Revised the drawing	2016/01/25 Roy
	B	Revised the P/N:2541HB-1XXB2-L→2541H-1XXB2-L	2010/04/14 Sam
AREA	REV.	DESCRIPTION	DATE