

SPECIFICATIONS

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: PBT+30% G.F. , UL 94V-0
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 7 D B S S X F - X X N X X X X A - 0 1

1: Tin shell + L(RoHS)
 2: Nickel shell + L(RoHS)

F: Female

No. of contacts

N: Non Type

N: Non accessories
 H: Front rivet #4-40 height=5.8
 I: Rear rivet #4-40 height=5.8
 J: Front rivet M3 height=5.8
 K: Rear rivet M3 height=5.8
 L: Rear rivet #4-40 height=4.0 + screw
 P: Rear rivet #4-40 height=5.0
 F: Rear rivet #4-40 height=4.0
 D: Front rivet #4-40 height=4.0


G0: Gold Flash
 GA: 5u"
 GB: 10u"
 GC: 20u"
 GD: 30u"
 S0: Selective
 SA: 5u"
 SB: 10u"
 SC: 20u"
 SD: 30u"

W: White insulator
 B: Black insulator
 U: Blue insulator






A: Tray



Standard Recommend

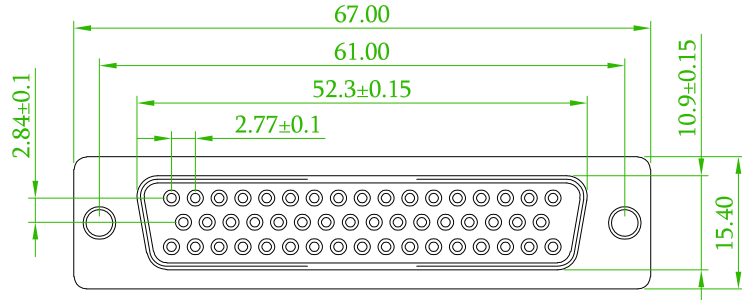

57DBSSXF-50NXXXXXA-01

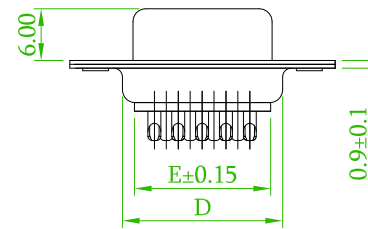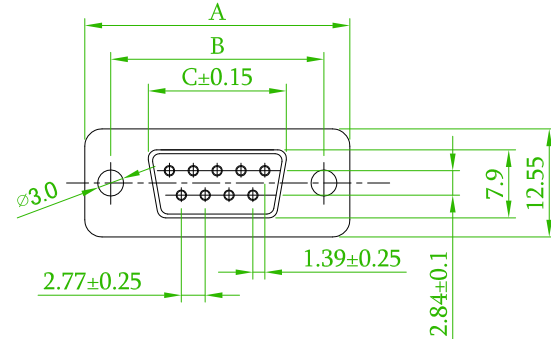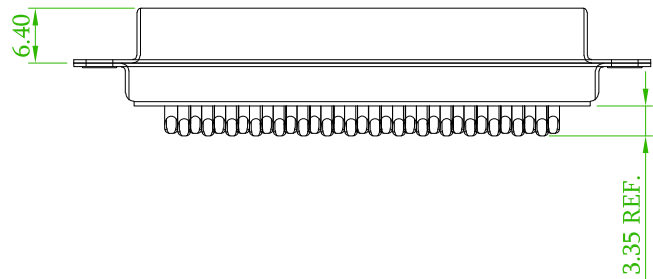

Contacts	A	B	C	D	E
9	30.81	24.99	16.33	19.28	15.60
15	39.14	33.32	24.66	27.65	24.60
25	53.04	47.04	38.38	41.10	37.70
37	69.50	63.50	54.83	57.30	54.50

Old Part No.: DBS-FXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
C x1	Add 50 pin.	Gary	2018/03/02
B x1	Add an option: D: Front rivet 4.0mm.	Gary	2017/10/13

<p>Amtek Technology Co., Ltd. TEL: 886-2-2268-8036 FAX: 886-2-2268-8035</p>	品名 TITLE	D-SUB SOLDER TYPE				
	品號 PART NO.	57DBSSXF-XXNXXXXXA-01		繪圖 DRAWN	Jeff	
	圖號 DRAWING NO.	GN010-GA670	版本 REV.	C	核對 CHECKED	Josh
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	