

SPECIFICATIONS

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: PBT+30% G.F. , UL 94V-0
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 7 D B S S X M - X X N X X X X A - 0 1

1: Tin shell + L(RoHS)
 2: Nickel shell + L(RoHS)

M: Male

No. of contacts

N: Non Type



N: Non accessories
 H: Front rivet #4-40 height=5.8
 L: Rear rivet #4-40 height=5.8
 J: Front rivet M3 height=5.8
 K: Rear rivet M3 height=5.8
 I: Rear rivet #4-40 height=4.0 + screw
 F: Rear rivet #4-40 height=5.0
 D: Front rivet #4-40 height=4.0


G0: Gold Flash
 GA: 5u"
 GB: 10u"
 GC: 20u"
 GD: 30u"
 S0: Selective
 SA: 5u"
 SB: 10u"
 SC: 20u"
 SD: 30u"

W: White insulator
 B: Black insulator
 U: Blue insulator




A: Tray



◎: Standard Recommend

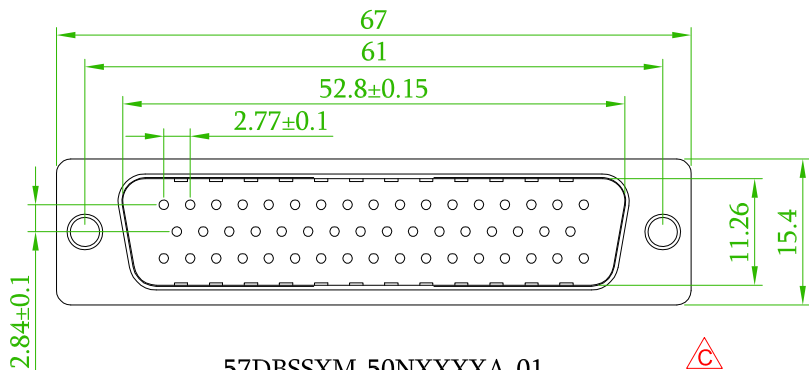

57DBSSXM-50NXXXXA-01

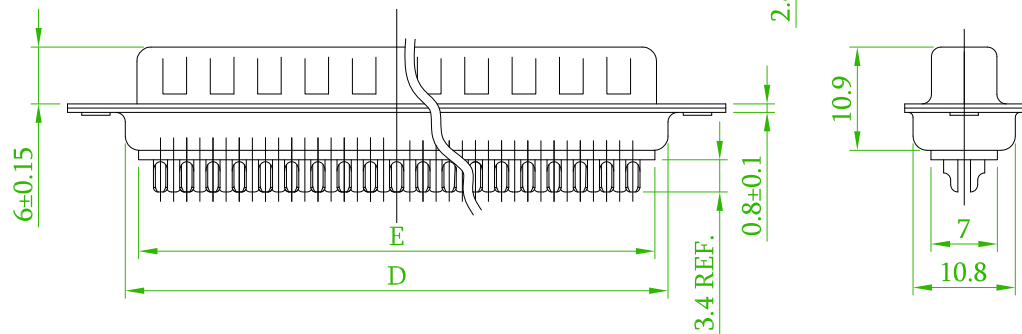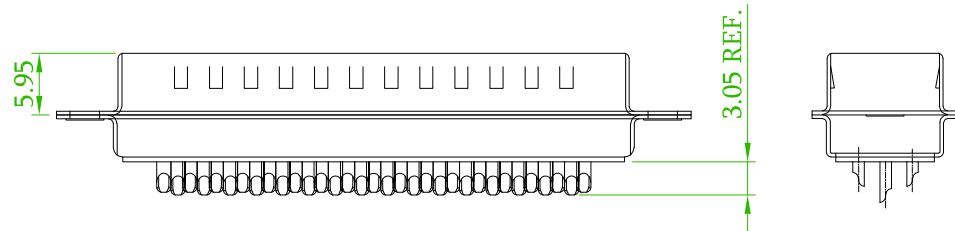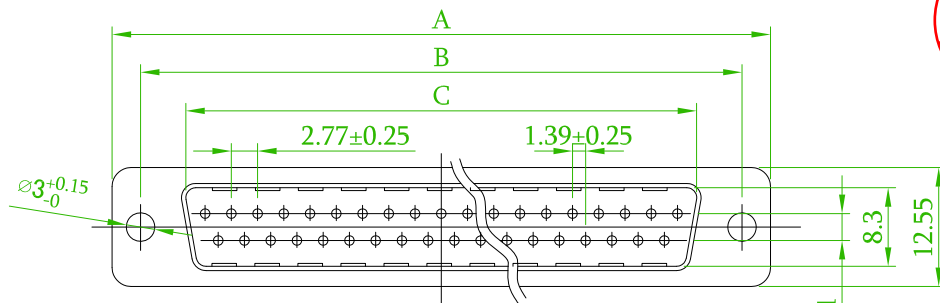

Contact	A	B	C	D	E
9	30.80	24.99	16.90	19.10	15.55
15	39.20	33.28	25.10	27.50	24.70
25	53.00	47.02	38.91	41.00	37.95
37	69.45	63.50	55.30	57.30	54.45

Old Part No.: DBS-MXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△C x1	Add 50 pin.	Gary	2018/03/02
△B x1	Add an option: D: Front rivet 4.0mm.	Gary	2017/10/13

<p>Amtek Technology Co., Ltd. TEL: 886-2-2268-8036 FAX: 886-2-2268-8035</p>	品名 TITLE	D-SUB SOLDER TYPE				
	品號 PART NO.	57DBSSXM-XXNXXXXA-01	繪圖 DRAWN	Jeff 2015/09/08		
	圖號 DRAWING NO.	GN010-GA671	版本 REV.	C	核對 CHECKED	Josh 2018/03/02
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/02
	公差 TOLERANCE	±0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION	