

**SPECIFICATION**

Current Rate:1 AMP  
 Voltage Rate:250V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Contact Resistance:20m Ω Max  
 Dielectric voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C


©:Standard Recommend

**MATERIAL**


Insulator:PBT+G.F,UL94V-0  
 Contact Pin:Copper Alloy

**ORDER INFORMATION**

5 8 I 3 D A B - X X X X A - 1



NUMBER OF POSITIONS	DIMENSION	
	A	B
06	2.54	8.00
08	3.81	9.27
10	5.08	10.54
12	6.35	11.81
14	7.62	13.08
16	8.89	14.35
20	11.43	16.89
24	13.97	19.43
26	15.24	20.70
30	19.05	23.24
34	20.32	25.78
40	24.13	29.59
50	30.48	35.94

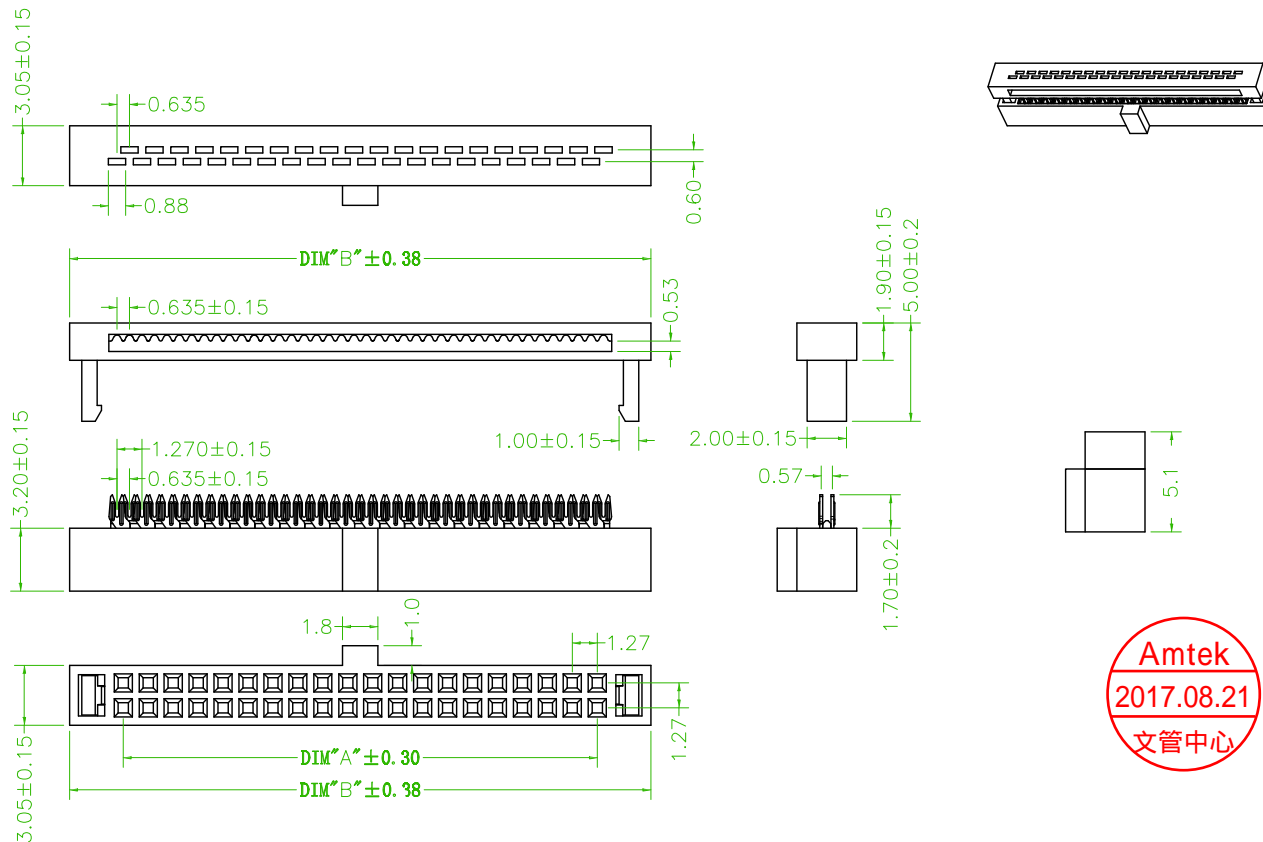

Old Part No.:IDC4-XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	Revised the Part No.:58I3DBB-XXXXA-1->58I3DAB-XXXXA-1	B	2016/10/13 Jeff

<p>糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	IDC Socket 1.27x1.27mm			
	品號 PART NO.	58I3DAB-XXXXA-1		繪圖 DRAWN	Roy 2016/06/07
	圖號 DRAWING NO.	版本 REV.	B	核對 CHECKED	Emily 2016/06/07
	客戶品號 CUSTOMER P/N	比例 SCALE	None	承認 APPROVED	John 2016/06/07
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION