


SPECIFICATIONS




Current Rating: 4A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-2

ORDER INFORMATION

5 H 2 5 4 2 N X - 1 X X W B L 0 0 A 0 1



No.of contacts	Dimensions	
	Dim.A	Dim.B
02	2.54	5.68
03	5.08	8.22
04	7.62	10.76
05	10.16	13.30
06	12.70	15.84
07	15.24	18.38
08	17.78	20.92
09	20.32	23.46
10	22.86	26.00
11	25.40	28.54
12	27.94	31.08
13	30.48	33.62
14	33.02	36.16
15	35.56	38.70
16	38.10	41.24
17	40.64	43.78
18	43.18	46.32
19	45.72	48.86
20	48.26	51.40

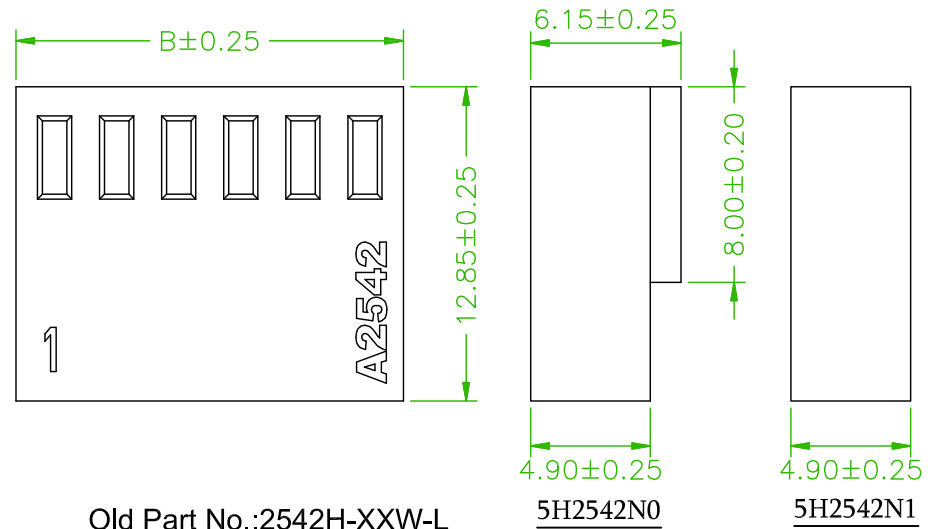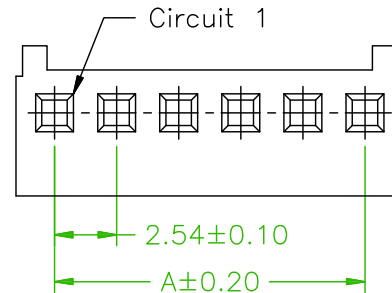

Old Part No.:2542H-XXW-L

5H2542N0

5H2542N1

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△X1	ECN NO. :170908,Revised the Color	Kilin	2017/09/07

<p>糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	2.54mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H2542NX-1XXWBL00A01			繪圖 DRAWN	Jeff 2016/10/27	
	圖號 DRAWING NO.	GW090-JF010	版本 REV.	B	核對 CHECKED	Jonny 2016/10/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/10/27	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		