

SPECIFICATIONS


Operation Temperature: -40°C to +105°C
 Insulation Resistance: 1000MΩ Min.
 Dielectric Voltage: 1500V AC for one minute

MATERIAL


Insulator: Nylon 66, UL94V-2

ORDER INFORMATION

5 H 3 9 6 0 D 0 - 1 X X W B L 0 0 H 0 1



No. of Contacts	Dimensions(mm)		No. of Contacts	Dimensions(mm)	
	A	B		A	B
2P	7.92	3.96	14P	55.44	51.48
3P	11.88	7.92	15P	59.40	55.44
4P	15.84	11.88	16P	63.36	59.40
5P	19.80	15.84	17P	67.32	63.36
6P	23.76	19.80	18P	71.28	67.32
7P	27.72	23.76	19P	75.24	71.28
8P	31.68	27.72	20P	79.20	75.24
9P	35.64	31.68	21P	83.16	79.20
10P	39.60	35.64	22P	87.12	83.16
11P	43.56	39.60	23P	91.08	87.12
12P	47.52	43.56	24P	95.04	91.08
13P	51.48	47.52	25P	99.00	95.04

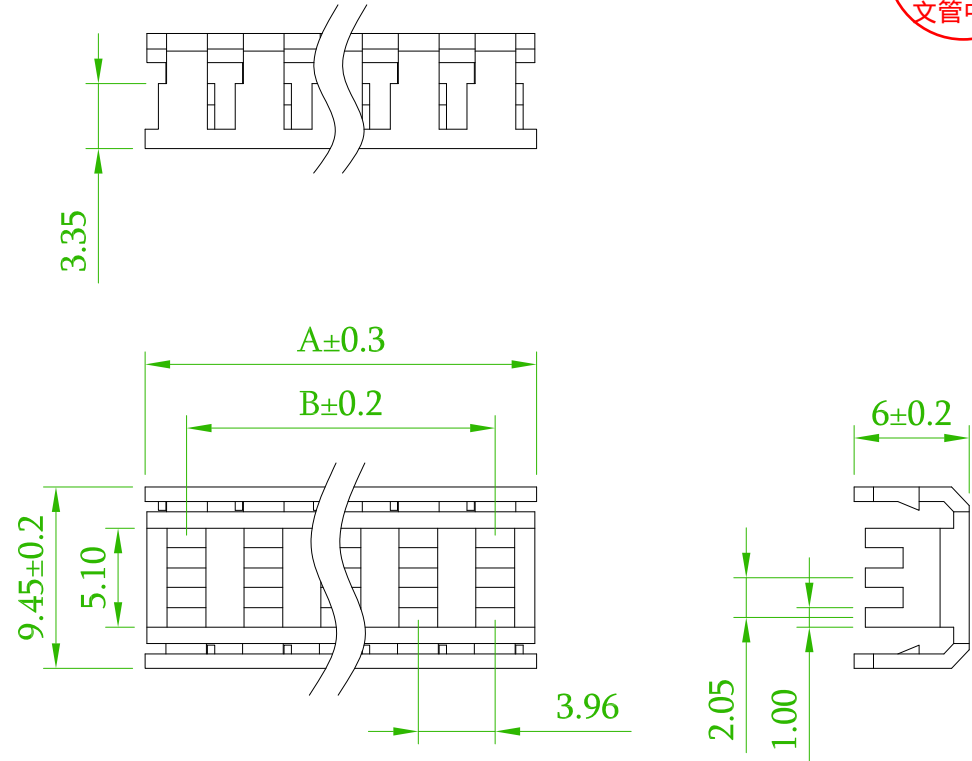

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

<p>Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	3.96mm HOUSING WIRE SIDE			頁數 Page	1/1
	品號 PART NO.	5H3960D0-1XXWBL00H01			繪圖 DRAWN	Gary
	圖號 DRAWING NO.	GW021-GB082	版本 REV.	A	核對 CHECKED	Josh
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason
	公差 TOLERANCE	.X ±0.20 .XX ±0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION	