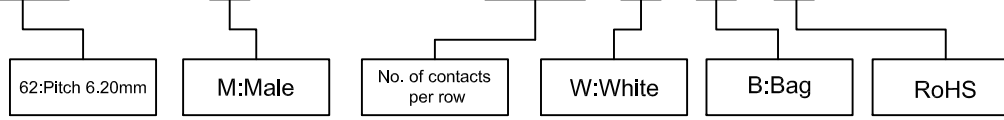


SPECIFICATIONS





Current Rating: 20A AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 7mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 2000V AC/minute
 Material: Nylon 66,UL94V-0

ORDER INFORMATION

5 H 6 2 0 1 M 0 - 1 X X W B L 0 0 G 0 1





No. of contacts	Dimensions	
	A	B
02	6.20	13.40
03	12.40	19.60
04	18.60	25.80

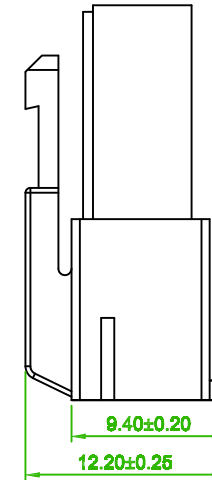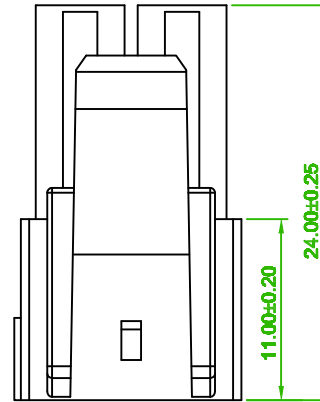

Old Part No.:6201H-M1XXW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	6.2mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5H6201M0-1XXWBL00G01			繪圖 DRAWN	Eloise 2017/05/09	
	圖號 DRAWING NO.	GN014-EL426	版本 REV.	A	核對 CHECKED	Jerry 2017/05/09	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/05/09	
	公差 TOLERANCE	.X ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		
		.XX ± 0.20					