

**SPECIFICATION**

Current Rating: 0.5 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 100mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operating Temperature: -40°C to +60°C






**MATERIAL**

Insulator: Hi-Temp. Thermoplastic, UL 94V-0, Black  
 Contact Pin: Copper Alloy  
 Shell: Stainless Steel


**ORDER INFORMATION**

5 K S I P - 0 6 X X N H A 0 1

P: Push-Push Type	No. of contacts	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated TE: Tin 200u"	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u"	N: W/O Peg	H: T/R W/O Cap
-------------------	-----------------	--	---	------------	----------------

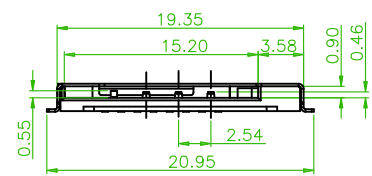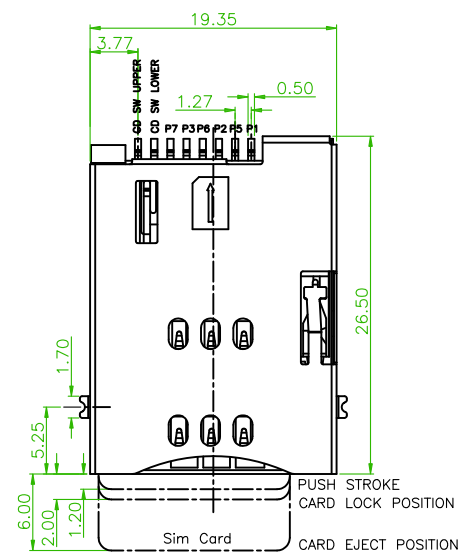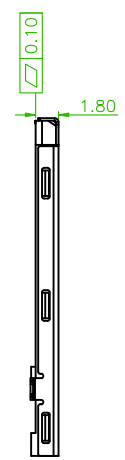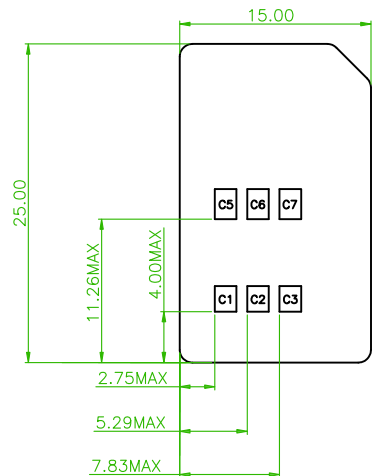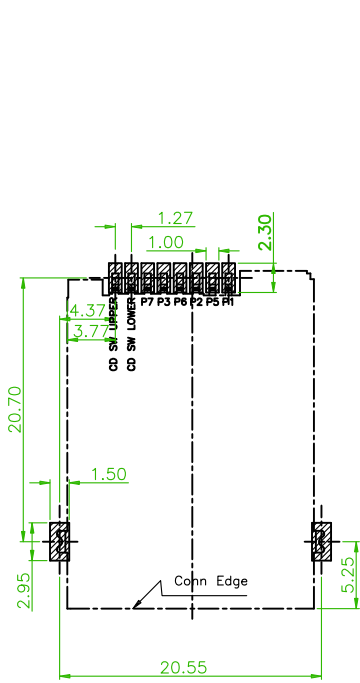

SIM pin assignment	
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

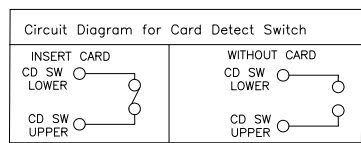

Old P/N : 5SIMP1-06XXH-01

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	SIM CARD				頁數 Page	1/1
品號 PART NO.	5KSIP-06XXNHA01				繪圖 DRAWN	Gary 2016/12/21
圖號 DRAWING NO.	GN108-GA075	版本 REV.	A	核對 CHECKED	Jonny 2016/12/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/21	
公差 TOLERANCE	.X±0.25 .XX±0.20	.X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	