

**Specifications**




Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C

**Material**

Insulator:Polyester,UL 94V-0  
 ◎Standard:P.B.T  
 Contact Pin:Copper Alloy

**ORDER INFORMATION**

5 P H 1 S D A 2 5 - 1 X X X X N N X L - A/B/000 - 0 0

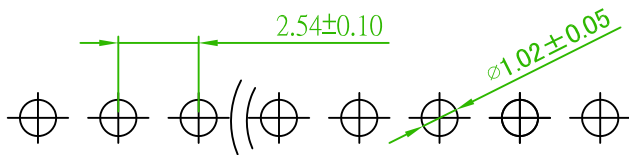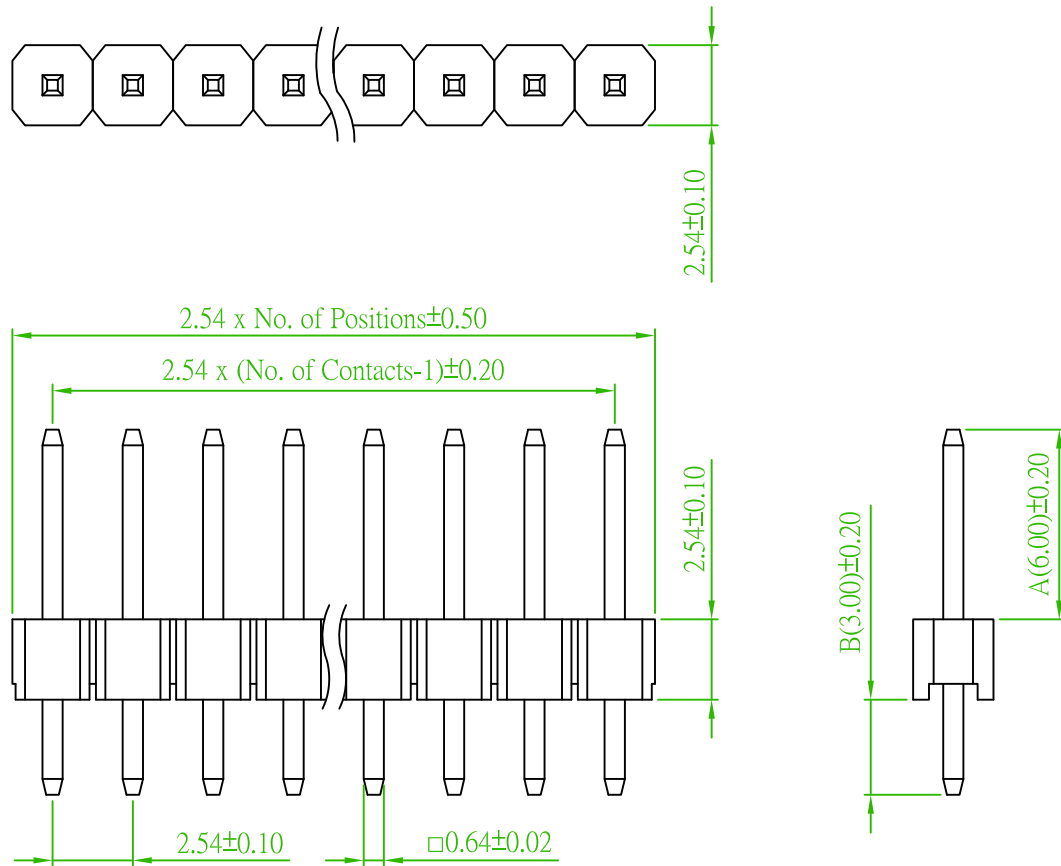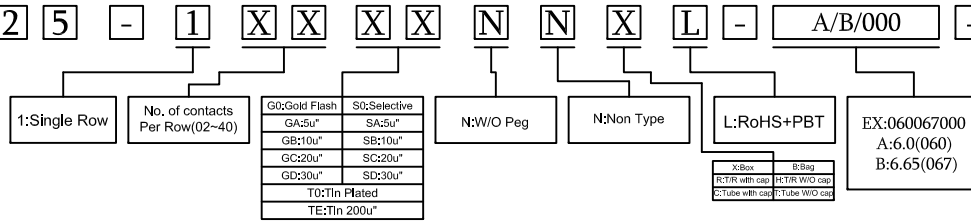

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

Old Part No. :PH1S25-1XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm PLASTIC HEIGHT 2.5mm DIP STRAIGHT			頁數 Page	1/1
	品號 PART NO.	5PH1SDA25-1XXXXNXXL -XXXXXX000-00			繪圖 DRAWN	Mia 2015/08/24
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/08/24
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/24
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION