

SPECIFICATIONS





Current Rating: 7 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -25°C to +85 °C

MATERIAL

Insulator: PBT, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P H A S D A 2 5 - 2 X X X X N N X L - A/B/000 - 0 0

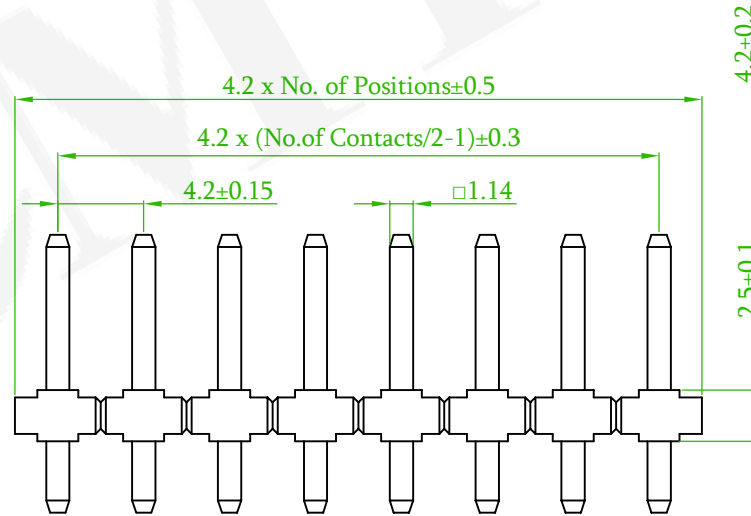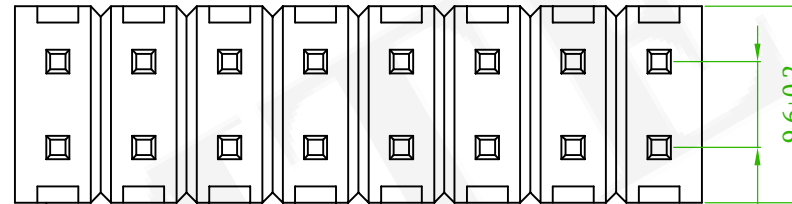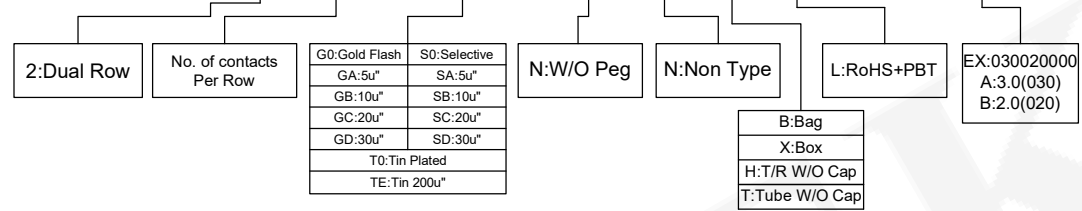

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. : PH42S25-2XX-L

 禮德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 4.2mm			頁數 Page	1/1
	品號 PART NO.	5PHASDA25-2XXXXNXL -XXXXXX000-00			繪圖 DRAWN	Mia 2016/12/09
	圖號 DRAWING NO.	GN016-MC126	版本 REV.	A	核對 CHECKED	Jonny 2016/12/09
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/09
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE