


1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass ,t=0.25mm.
- 1.3 Shell: Cold Rolled Steel,t=0.35mm.

ORDER INFORMATION

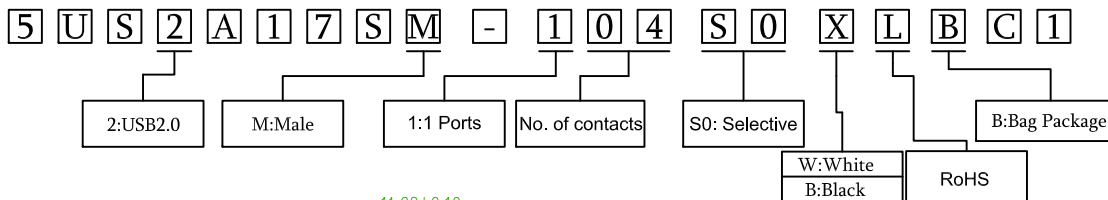


2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Shell: Nickel plated.

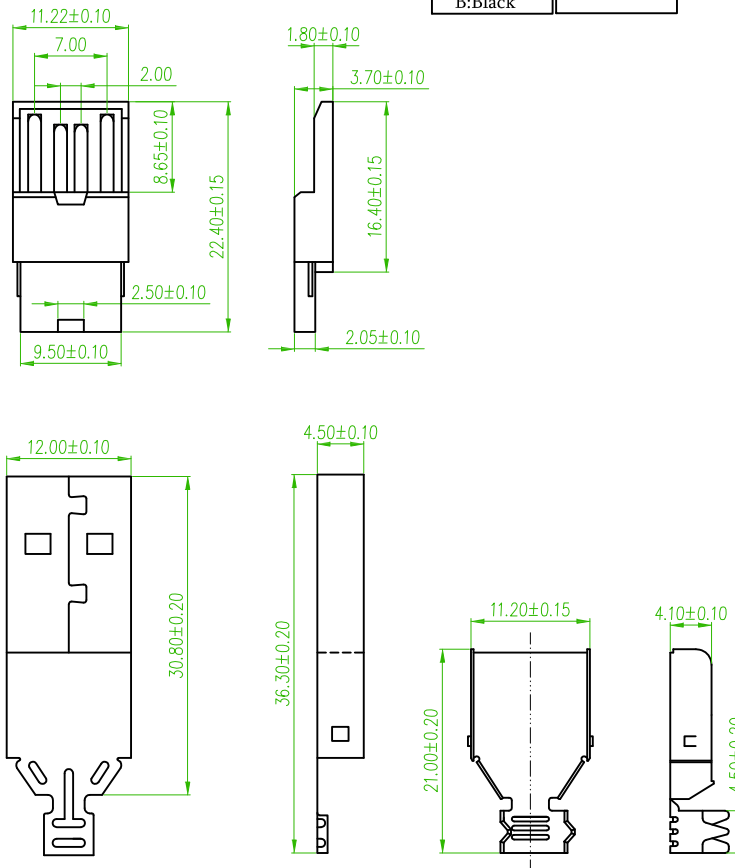

4	Back-shell	1	Cold Rolled Steel	T=0.35mm	Nickel Plated
3	Front-shell	1	Cold Rolled Steel	T=0.35mm	Nickel Plated
2	Contact	4	Brass	T=0.20mm	Selective
1	Housing	2	P.B.T	UL 94-V0	Black/White
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

Old Part No.:USB-MSL-AX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------

<p>Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	USB A TYPE Male Solder				頁數 Page	1/1
	品號 PART NO.	5US2A17SM-104S0XLBC1				繪圖 DRAWN	Jeff 2016/09/12
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny 2016/09/12	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/12	
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		