


SPECIFICATION

Current Rating: 1 AMP
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 500V AC/minute





MATERIAL

Contact: Brass
 Insulator: Nylon 9T, UL94V-0

ORDER INFORMATION

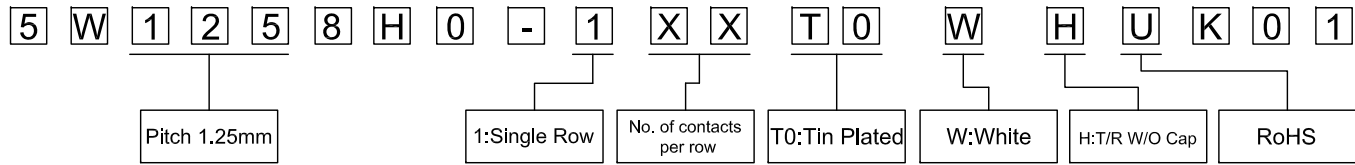

No. of contacts	Dimensions		
	A	B	C
02	1.25	3.85	5.75
03	2.50	5.10	7.00
04	3.75	6.35	8.25
05	5.00	7.60	9.50
06	6.25	8.85	10.75
07	7.50	10.10	12.00
08	8.75	11.35	13.25
09	10.00	12.60	14.50
10	11.25	13.85	15.75
11	12.50	15.10	17.00
12	13.75	16.35	18.25
13	15.00	17.60	19.50
14	16.25	18.85	20.75
15	17.50	20.10	22.00

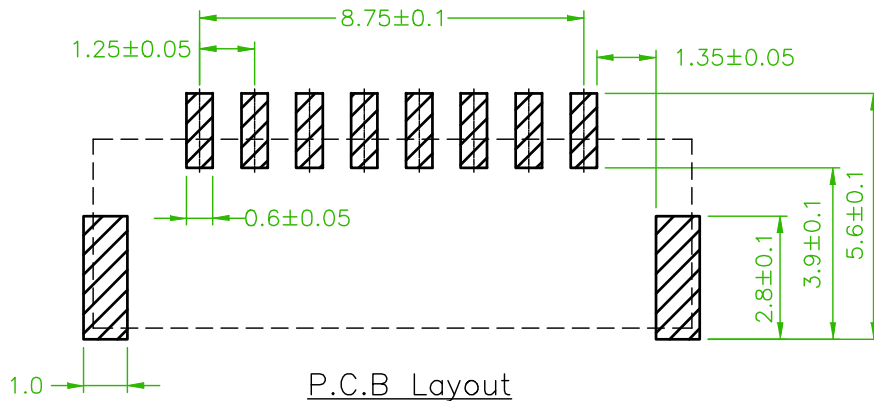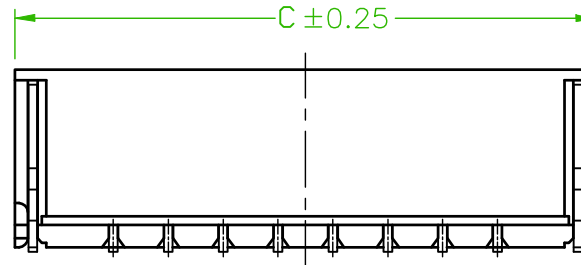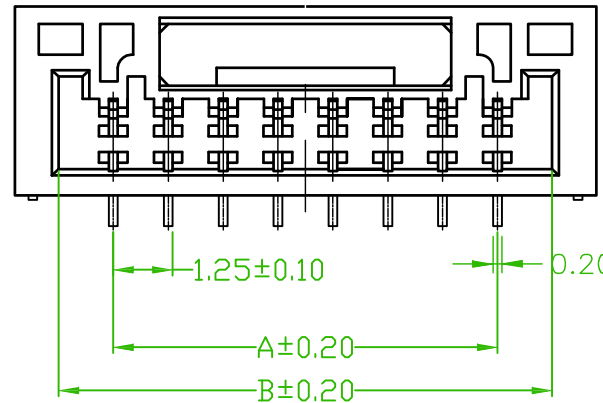

Old Part No. : 1258MR-1XXTW-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm WAFER SMT R/A TYPE			頁數 Page	1/1
	品號 PART NO.	5W1258H0-1XXT0WHUK01			繪圖 DRAWN	Eloise 2017/06/29
	圖號 DRAWING NO.	GN137-EL543	版本 REV.	A	核對 CHECKED	Carol 2017/06/29
	客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	Jason 2017/06/29
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	