

SPECIFICATIONS



Current Rating: 2A AC, DC
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -25°C to +85°C

MATERIAL


Contact Pin: Brass
 Insulator: Nylon 66, UL94V-0

ORDER INFORMATION

5 W 2 0 0 1 S 0 - 1 X X X X W X L T 0 1

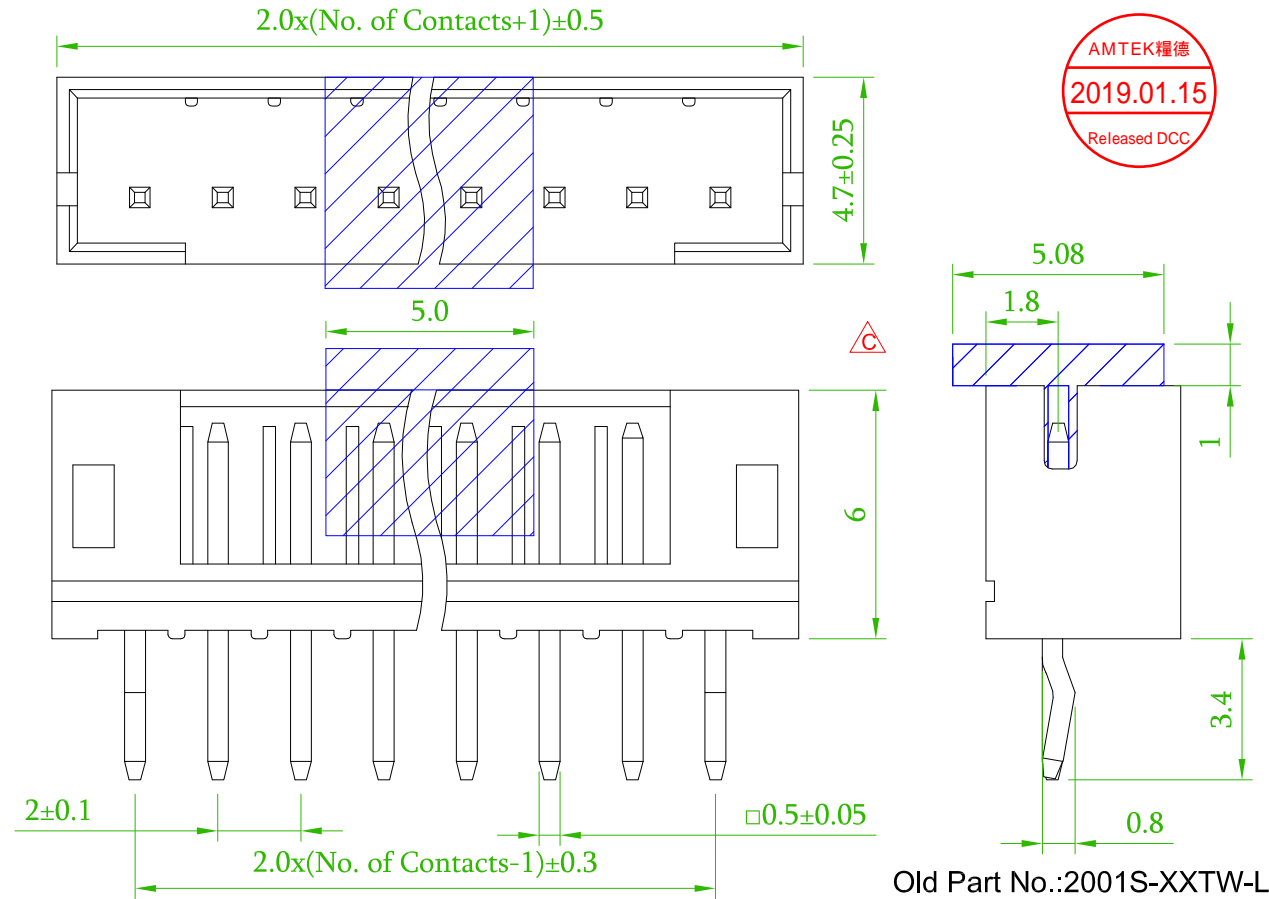

Old Part No.:2001S-XXTW-L

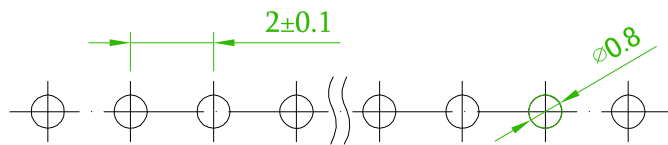

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

△x2	Add an option: R: T/R With Cap.	Gary	2019/01/15
△x1	Add an option of plated: G0: Gold Flash.	Gary	2018/05/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm WAFER V/T DIP TYPE			頁數 Page	1/1
	品號 PART NO.	5W2001S0-1XXXXWXLT01			繪圖 DRAWN	Mia
	圖號 DRAWING NO.	GN016-GB169	版本 REV.	C	核對 CHECKED	Josh
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason
	公差 TOLERANCE	±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	