



# ORDER INFORMATION

## SPECIFICATION


Current Rating: 2.5 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Voltage: 600V AC for one minute  
 Operation Temperature: -25°C to +85 °C

## MATERIAL


Insulator: PBT, UL 94V-0  
 Contact Pin: Copper Alloy

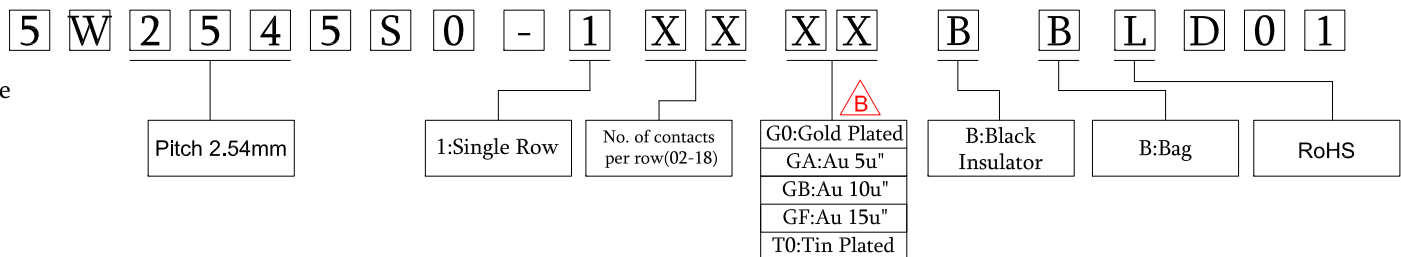


4-18 Pin



3 Pin





2 Pin

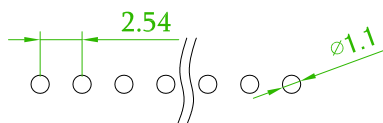

P.C.B. LAYOUT  
 TOLERANCE: ±0.1

$2.54 \times (\text{No. of Positions} + 1) \pm 0.5$

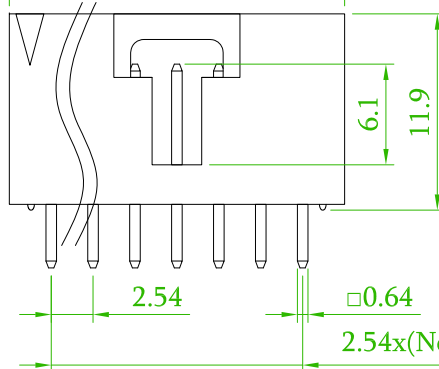

Old Part No.:2545S-XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
$\Delta$ x1	Add plated: GA, GB, GF.	Gary	2017/09/15

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm Mini Latch WAFER STRAIGHT			頁數 Page	1/1
	品號 PART NO.	5W2545S0-1XXXXBBLD01			繪圖 DRAWN	Jeff 2016/08/18
	圖號 DRAWING NO.	GW097-GA628	版本 REV.	B	核對 CHECKED	Boris 2016/08/18
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/18
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	