

SPECIFICATIONS

Current Rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

Contact Resistance: 10mW Max

Dielectric Voltage: 1500V AC for one minute

Operation temperature: -40°C~105°C △B


MATERIAL

Insulator:LCP,UL94V-0

Contact:Brass


Glow-Wire Flammability(GWF) IEC 60695-2-12

No. of Contacts	Dim. A	Dim. B
2x01	--	6.65
2x02	3.0	9.65
2x03	6.0	12.65
2x04	9.0	15.65
2x05	12.0	18.65
2x06	15.0	21.65
2x07	18.0	24.65
2x08	21.0	27.65
2x09	24.0	30.65
2x10	27.0	33.65
2x11	30.0	36.65
2x12	33.0	39.65



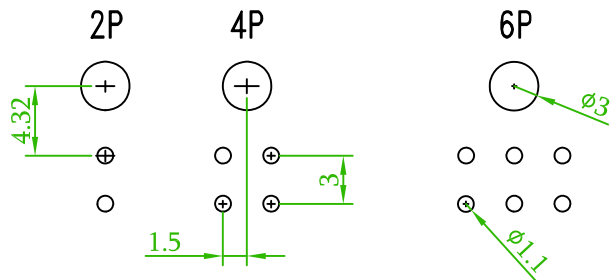


PCB LAYOUT
TOLERANCE ±0.1

ORDER INFORMATION

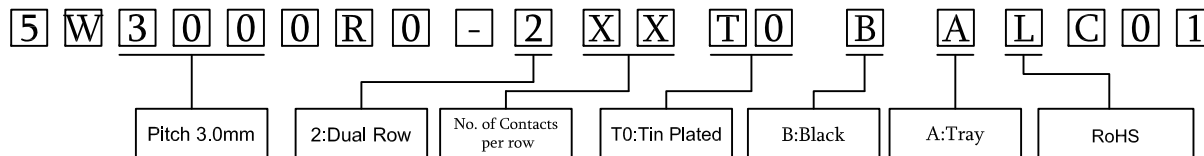

Circuit No. 1

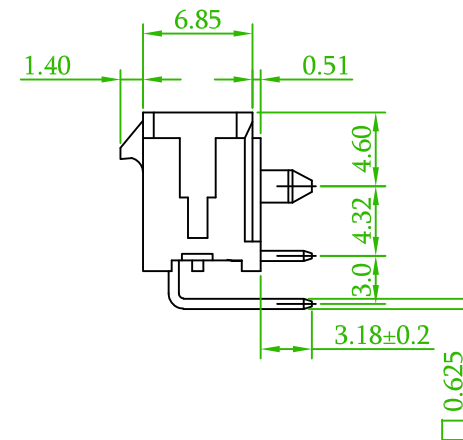

△B x1	Revise operation temperature	Andy	2017/09/06
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

<p>Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	3.0mm WAFER			頁數 Page	1/1
	品號 PART NO.	5W3000R0-2XXT0BALC01			繪圖 DRAWN	Eloise 2016/11/25
	圖號 DRAWING NO.	GW083-EL327	版本 REV.	B	核對 CHECKED	Jonny 2016/11/25
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/25
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	