

SPECIFICATION 



Current Rating:25mA at 24V DC,10mA at 50V DC Switching
 Contact Resistance:50mΩ max.
 Insulation Resistance:100mΩ min
 Dielectric Voltage:AC 500V for 1 minute
 Operation Temperature range:-40°C~+85°C
 Switch Capacitance:5pF at 1 megahertz.
 Operation Force:800gf Max

MATERIAL



Contact: Copper Alloy, Gold 4u"

ORDER INFORMATION


6 4 S W T - A X X B 0 4 5

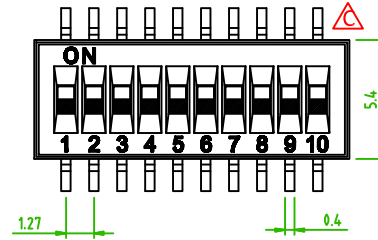



Part No	Pin	DIM.A
64SWT-Ax2B045	02	4.14
64SWT-Ax4B045	04	6.68
64SWT-Ax6B045	06	9.22
64SWT-Ax8B045	08	11.76
64SWT-AxAB045	10	14.30

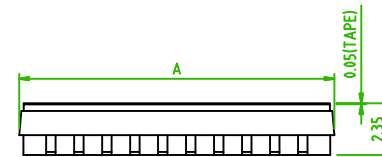



SCHEMATIC

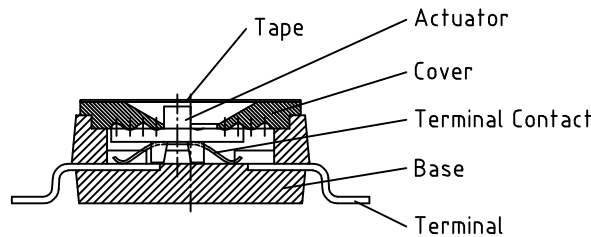


P.C.B LAYOUT



Part Name	Material	Finished
Base	PPS UL94 V0	Black
Cover	PPS UL94 V0	Black
Actuator	Nylon UL94 V0	White
Movable	Copper Alloy	Gold
Terminal Contact	Brass	Gold
Terminal	Brass	Gold
Tape	Polyimide	Amber

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	Revise the P/N:64SWT-AGXB045->64SWT-AXXB045	C	2016/11/23 Mia
	Revise the P/N:64SWT-AxxB045->64SWT-AGXB045	B	2016/10/25 Roy

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Switch			頁數 Page	1/1	
	品號 PART NO.	64SWT-AXXB045		繪圖 DRAWN	Ann 2014/07/09		
	圖號 DRAWING NO.	GW227-MC069	版本 REV.	C	核對 CHECKED	Hank 2014/07/09	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Joey 2014/07/09	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	