Box Header 2.54mm SMT / R/A / Straight / Press fit / IDC Type

Specifications
Current Rate:3 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material
Insulator:P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

ORDER INFORMATION

B H 1 X - X X X B X X X L1/E X X - X

- X: M:SMT Type; R:Right Angle Type; S:Straight Type; E:Elevated Type; AR:Right Angle A Type; AS:Straight A Type; I:IDC Type
- X: No. of Contact (06~64); (10~64) for IDC & Press fit Type
- X: ◎G:Gold Flash; GA:Gold 5u"; GB:Gold 10u"; GC:Gold 20u"; GD:Gold 30u"; S:Selective; SA:Selective 5u"; SB:Selective 10u"; SC:Selective 20u"; SD:Selective 30u"; T:Tin Plated; TE:Tin 200u"
- X: ◎B:Black insulator; Y:Gray insulator; (IDC Type only for Y)
- X: ◎O:W/O Cap; C:With Cap
- X: ◎O:W/O Peg; P:With Peg; (SMT Type only Unavailable Elevated Type)
- X: ◎A:Tray; T:Tube; R:Tape & Reel
- L1/E: Fill in Dimension For Special Design; (For BH1E only)
- X: 2:W/O SR; (IDC Type only)
- X: 1:With Ear; 2:W/O Ear
- X: L:RoHS + P.B.T; U:RoHS + Hi-Temp.; (U for SMT Type & AR / AS only)

◎:Standard Recommend

Box Header 2.54mm SMT / Right Angle / Straight Type

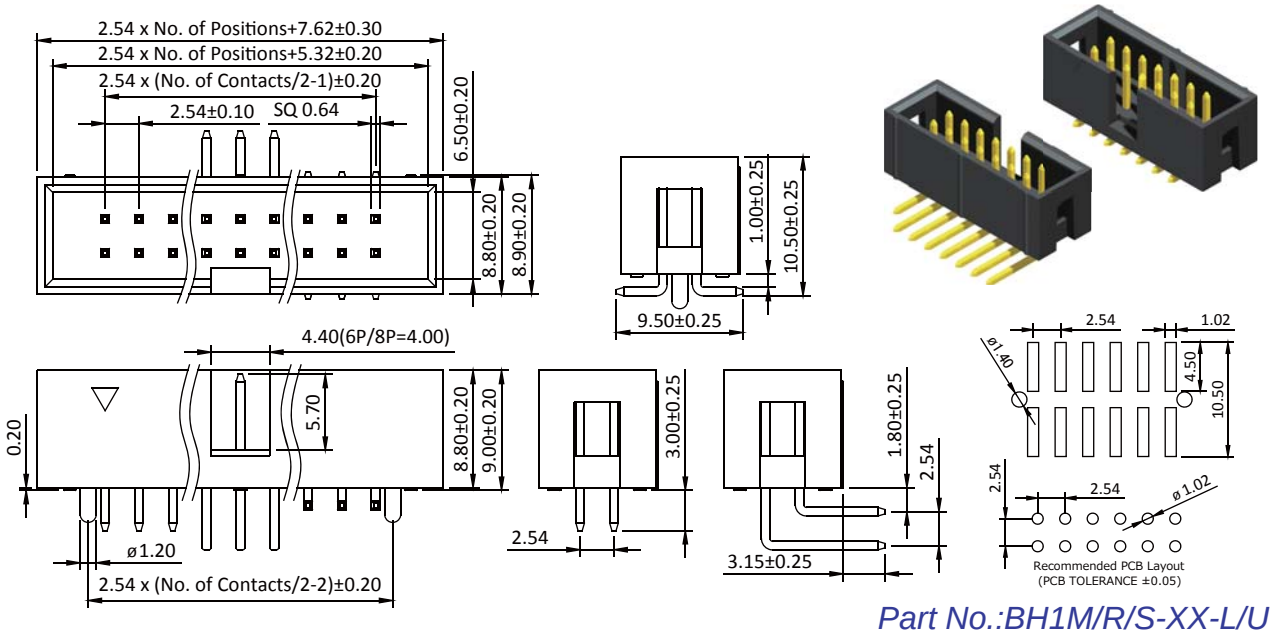

Part No.:BH1M/R/S-XX-L/U

Box Header 2.54mm Elevated SMT / Straight Type

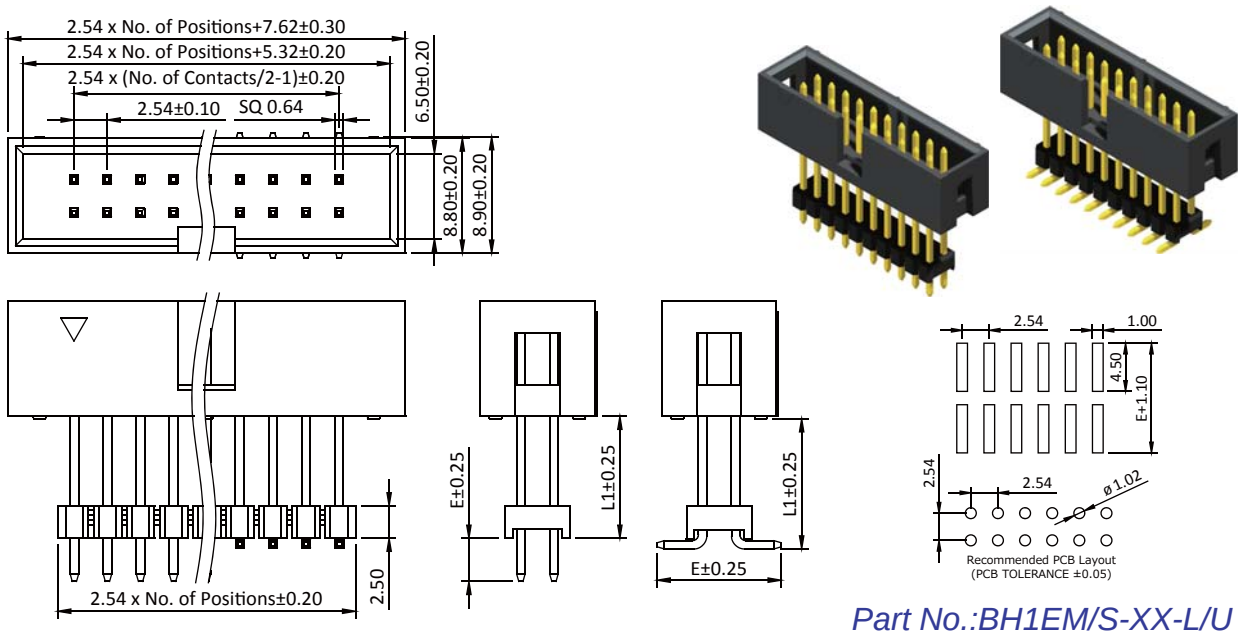

Part No.:BH1EM/S-XX-L/U