
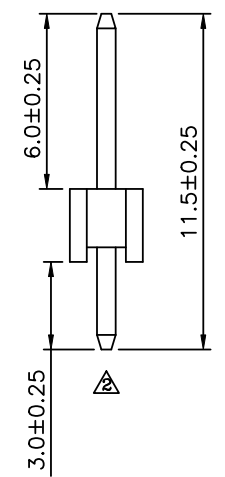
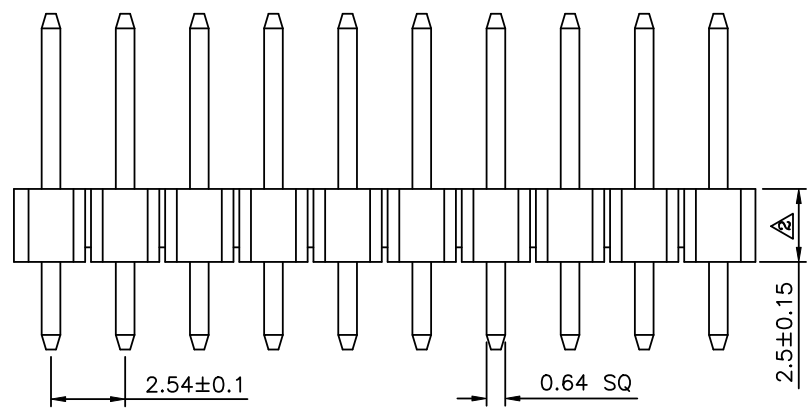


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

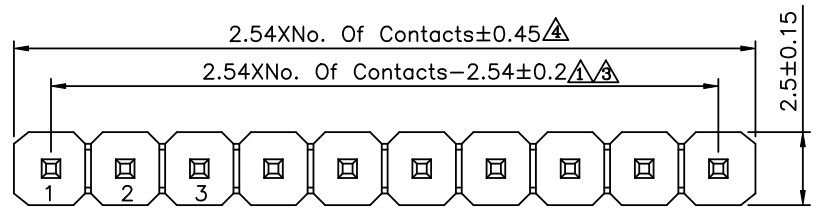

**SPECIFICATION**  
 Current Rating:3 Amp  
 Withstanding Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Flash Over Nickel  
 Insulator:PBT(UL94V-0),Black  
 RoHS Compliant

- H D 1 X XX - H  
 (1) (2) (3) (4) (5)  
 (1) H:2.54mm Pin Header  
 (2) D:DIP Straight  
 (3) 1:Single Row  
 (4) XX:No. Of Position/Per Row  
 (5) H:RoHS Compliant

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 .X* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*	△ A4	Modify Data	HZF	01/04/2017
PART No. HD1XXX-H		EMILY			△ A3	Modify Data	HZF	02/09/2015
DRAWING No. HD1XXX-H		CHECKED BY HZF			△ A2	Modify Data	HZF	04/14/2014
SCALE		DRAWING BY CYP			△ A1	Modify Dim. A±0.1-->A±0.3	HZF	02/22/2011
SCALE	NONE	REV.	A4	UNIT mm	△ A0	NEW RELEASE	HZF	12/09/2009
					NO.REV.	REVISIONS	CHK	DATE