




# Heyco® Snap-In Cordgrips

- Available in multiple sizes for cable diameters ranging from .065" (1,7 mm) to 1.560" (39,6 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Smooth, rounded interior edges for ease of installation.
- Ratchet design of sealing nut assembly provides superior anti-vibration and ensures a firm grip on the cable.
- Easy to install—no tools required.
- Unique fingers securely lock into a range of panel sizes without use of locknut.
- Rotation prevented when used in "Double D" mounting holes.
- Limited intrusion into enclosure where access is tight.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.	DESCRIPTION	PART DIMENSIONS							
Min. Dia.		Max. Dia.				Black	A Mounting Hole		B To Prevent Rotation		C Panel Thickness		D Max. O.A. Length
in.	mm.	in.	mm.		in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.115	2,9	.250	6,4	<b>M4800</b>	SCG 500	.500	12,7	.450	11,4	.062-.125	1,6-3,2	1.210	30,7
.065	1,7	.220	5,6	<b>M4802</b>	RSCG 500								
.105	2,7	.312	7,9	<b>M4806</b>	SCG 625	.625	15,9	.550	14,0	.062-.125	1,6-3,2	1.300	33,0
.065	1,7	.187	4,8	<b>M4808</b>	RSCG 625								
.230	5,8	.395	10,0	<b>M4812</b>	SCG 750	.750	19,1	.660	16,8	.062-.125	1,6-3,2	1.480	37,6
.069	1,8	.250	6,4	<b>M4814</b>	RSCG 750								
.170	4,3	.450	11,4	<b>M4818</b>	SCG 875	.875	22,2	.770	19,6	.062-.125	1,6-3,2	1.460	37,1
.095	2,4	.260	6,6	<b>M4820</b>	RSCG 875								
.260	6,6	.546	13,9	<b>M4824</b>	SCG 1000	1.000	25,4	.875	22,2	.062-.125	1,6-3,2	1.620	41,1
.180	4,6	.440	11,2	<b>M4826</b>	RSCG 1000								
.485	12,3	.709	18,0	<b>M4830</b>	SCG 1093	1.093	27,8	.970	24,6	.062-.125	1,6-3,2	1.750	44,5
.250	6,4	.485	12,3	<b>M4832</b>	RSCG 1093								
.485	12,3	.709	18,0	<b>M4836</b>	SCG 1125	1.125	28,6	1.000	25,4	.062-.125	1,6-3,2	1.750	44,5
.250	6,4	.485	12,3	<b>M4838</b>	RSCG 1125								
.590	15,0	.920	23,4	<b>M4842</b>	SCG 1250	1.250	31,8	1.125	28,6	.062-.125	1,6-3,2	2.050	52,1
.490	12,4	.787	20,0	<b>M4844</b>	RSCG 1250								
.590	15,0	1.000	25,4	<b>M4848</b>	SCG 1375	1.375	34,9	1.250	31,8	.062-.125	1,6-3,2	2.050	52,1
.490	12,4	.787	20,0	<b>M4850</b>	RSCG 1375								
.865	22,0	1.180	30,0	<b>M4854</b>	SCG 1500	1.500	38,1	1.375	34,9	.062-.125	1,6-3,2	2.228	57,9
.787	20,0	1.020	25,9	<b>M4856</b>	RSCG 1500								
.865	22,0	1.260	32,0	<b>M4860</b>	SCG 1750	1.750	44,5	1.625	41,3	.062-.125	1,6-3,2	2.280	57,9
.787	20,0	1.020	25,9	<b>M4862</b>	RSCG 1750								
1.230	31,2	1.560	39,6	<b>M4866</b>	SCG 2000	2.000	50,8	1.875	47,6	.062-.125	1,6-3,2	2.410	61,2
1.000	25,4	1.240	31,5	<b>M4868</b>	RSCG 2000								
1.450	36,8	1.560	39,6	<b>M4872</b>	SCG 2375	2.375	60,3	2.250	57,2	.062-.125	1,6-3,2	2.500	63,5
1.160	29,5	1.350	34,3	<b>M4874</b>	RSCG 2375								

Standard color black.

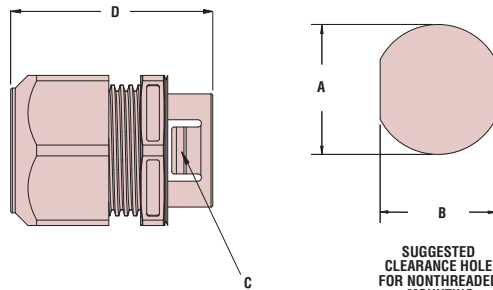

Quick Specs

Materials  
 Certifications  
 Flammability Rating  
 Temperature Rating

6/6 Nylon w/Buna N Sealing Gland  
 (UL) Listed under Underwriters' Laboratories File E51579  
 94V-2  
 -22°F (-30°C) to 212°F (100°C)