


Stamped Pin IC Socket 1.778mm

Specifications
 Current Rate: 5 AMP
 Insulation Resistance: 5000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -55°C to +105°C

Material
 Insulator: Polyester, UL 94V-0
 ©Standard: P.B.T
 Terminal: Copper Alloy
 Plated: Tin Plated

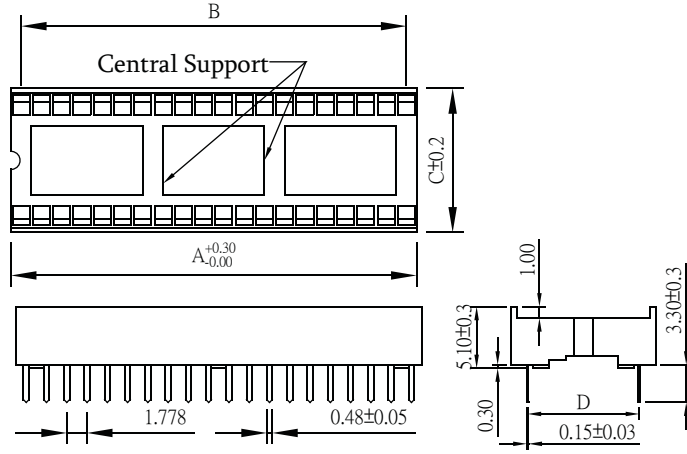


A, B, C, D Tolerance is ±0.2

No. of Conatscts	16-B	20-B	22-B	24-B	24-A	28-A	30-A	32-A	40-A	42-A	48-A	52-A	54-A	56-A	58-A	60-A	62-A	64-A	64-A
A	14.22	17.78	19.56	21.34	21.34	24.89	26.67	28.45	35.56	37.34	42.67	46.23	48.01	49.78	51.56	53.54	55.12	56.90	56.90
B	12.45	16.00	17.78	19.56	19.56	23.11	24.89	26.67	33.78	35.56	40.89	44.45	46.23	48.01	49.78	51.56	53.34	55.12	55.12
C	10.10				12.65				17.70				21.55						
D	7.62				10.16				15.24				19.05						
	IC2-3-XX				IC2-4-XX				IC2-6XX				IC2-7-XX						

Part No.: IC2-XX-L

Stamped Pin IC Socket 2.54mm

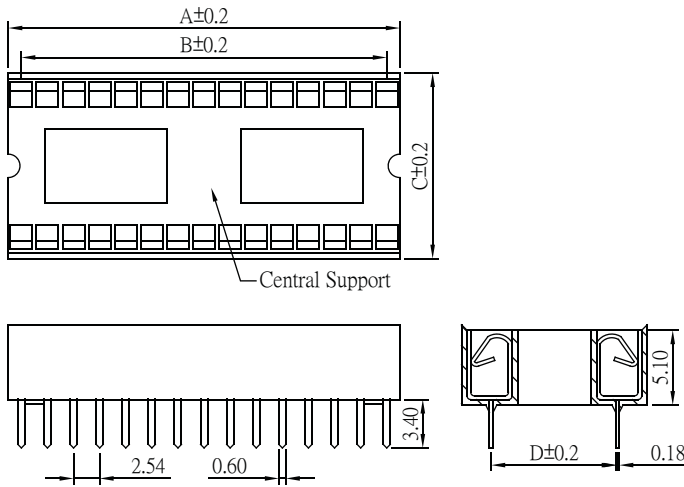


A, B, C, D Tolerance is ±0.2

No. of Conatscts	6-B	8-B	14-B	16-B	18-B	20-B	22-B	24-A	28-A	32-A	24-A 24-B	28-A 28-B	32-A 32-B	40-A 40-B	48-B
A	7.62	10.16	17.78	20.32	22.86	25.40	27.94	30.48	35.56	40.64	30.48	35.56	40.64	50.80	60.96
B	5.08	7.62	15.24	17.78	20.32	22.86	25.40	27.94	33.02	38.10	27.94	33.02	38.10	48.26	58.42
C	10.00												17.50		
D	7.62												15.24		
	IC1-3XX												IC1-6XX		

Part No.: IC1-XX-L

ORDER INFORMATION

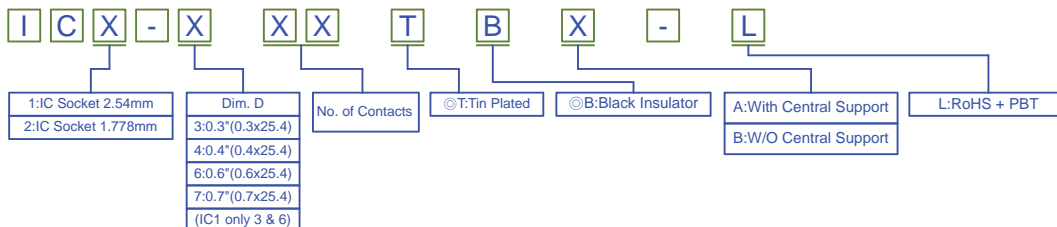

©: Standard Recommended