


	2										
	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">基本尺寸 (mm)</td> <td style="width: 15%;">0.5~6</td> <td style="width: 15%;">&gt;6~30</td> <td style="width: 15%;">&gt;30~120</td> <td style="width: 15%;">&gt;120~400</td> </tr> <tr> <td>公差 (mm)</td> <td>?1</td> <td>?2</td> <td>?3</td> <td>?5</td> </tr> </table>	基本尺寸 (mm)	0.5~6	>6~30	>30~120	>120~400	公差 (mm)	?1	?2	?3	?5
基本尺寸 (mm)	0.5~6	>6~30	>30~120	>120~400							
公差 (mm)	?1	?2	?3	?5							
加工方式	<p style="text-align: right;"><b>技术要求</b> 其余 <math>\nabla 3.2</math></p> <p>1.接触片接触部位<b>必须</b>光滑平整</p>										
下料尺寸mm											
下料规格mm											
毛重 kg											
净重 kg											
镀银面积dm <sup>2</sup>											
借通用件登记											
描图											
校描											
旧底图总号											
签字	<b>Liyond Electric Co.,Ltd</b>										
日期	<b>LYA111 GC5-2000A</b> Tulip contact with 42 sheets										
订单号:	共 页 第 页										
	数量:										
1	2										

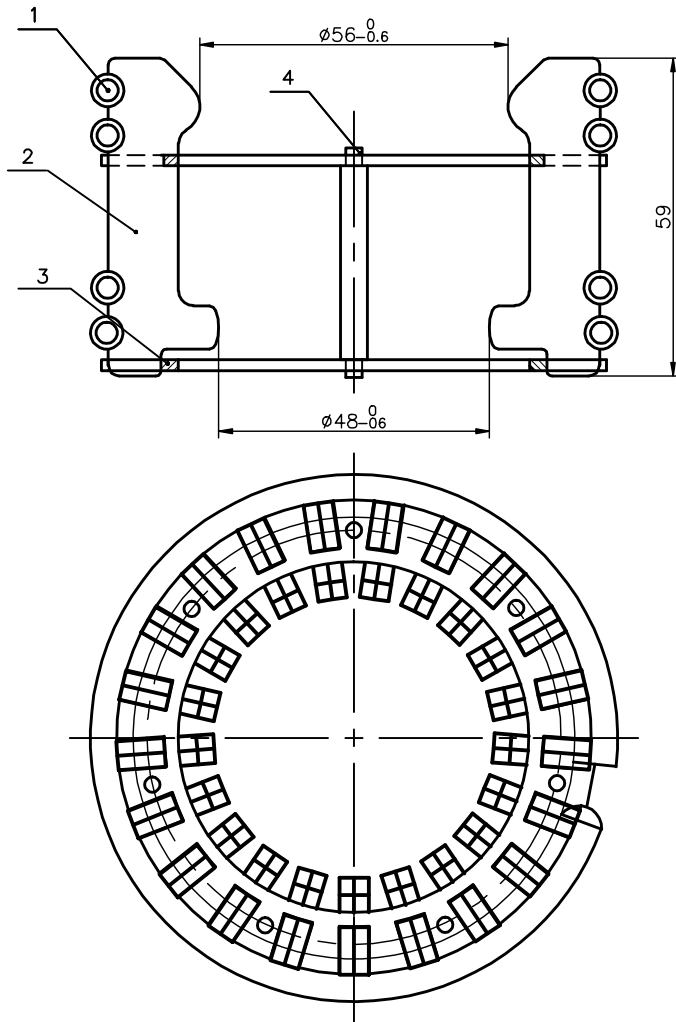

A

B