

PART NO. AND CH. CODE	W ₁	W ₂	H ₁	H ₂	R ₁	R ₂	(REFERENCE) WIRE SIZE (mm ²)
7116-4100-02	2.30	2.80	(2.30)	(3.50)	0.45	0.45	△ 0.3~0.5 EQUIVALENT
7116-4101-02	3.00	3.40	△ (2.95)	(4.10)	0.65	0.65	△ 0.6~1.25, 0.35+0.35, 0.35+0.5 EQUIVALENT
7116-4104-02	△ 3.10	3.70	△ (3.15)	(4.60)	0.65	0.65	△ 0.35+0.75, 0.5+0.5 1.5 EQUIVALENT

注記





1. 嵌合雄ターミナル品番: 7114-4100-02 ETC.

△△ 2. 7116-4104-02における通電電流値は、1.0 mm²相当以下とする。

NOTES

1. MATING TERMINAL No.: 7114-4100-02 ETC.

△△ 2. CURRENT FOR 7116-4104-02 SHALL BE THE
CURRENT FOR 1.0 mm² WIRE OR UNDER.

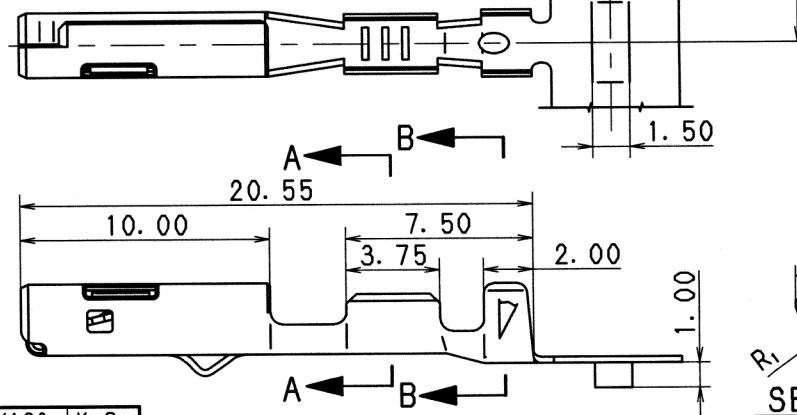

APPLICABLE WIRE SIZE MARK



(7116-4100-02)



(7116-4101-02)



(7116-4104-02)

△	04.04.19	CHANGED WIRE SIZE	C04-X190	K. O
△	03.07.10	CHANGED WIRE SIZE & NOTE	C03-X450	K. O
△	99.06.15	ADDED NOTE	C99-L932	H. O
△	98.12.22	CHANGED DIMENSION & WIRE SIZE	C98-M210	N. S
△	95.09.06	NEW	C95-M059	Y. W
LET	DATE	REVISION RECORD	NO.	CHKD

CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.	
OFFICE		TRIAL PART NO.		VENDOR	
VENDOR NO.		DWG TYPE		DWG SOURCE	
DWG DATE		UNIT		SCL	
ANGLE		APPROVED		CHECKED	
DESIGN		DRAWN		K. OHTAKA	
KIKUCHI		原		95.05.29	
04.04.19		04.04.23		2004.04.21	

MATL. COPPER ALLOY t=0.25	TREAT. & FIN.
SPEC. (TIN PLATING)	
NAME 1.5 SYSTEM CONNECTOR	
FEMALE TERMINAL	

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
(C)	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED							
MASS g							

PART NO.	7116-4100-02 ETC.	
CH. CODE	7116-4100-02:R	
DWG NO.	7116-4100-02:R	
SET DWG NO.	YAZAKI CORPORATION	

1

2

3