

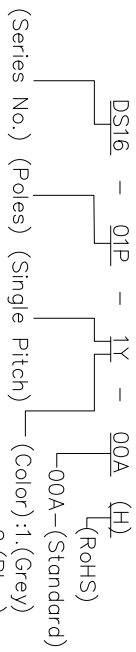



REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

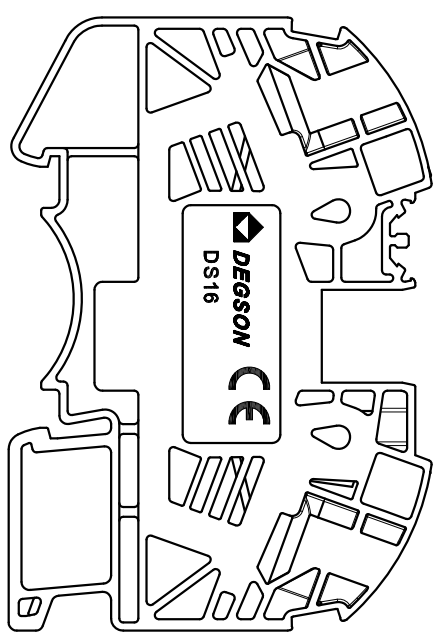

- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

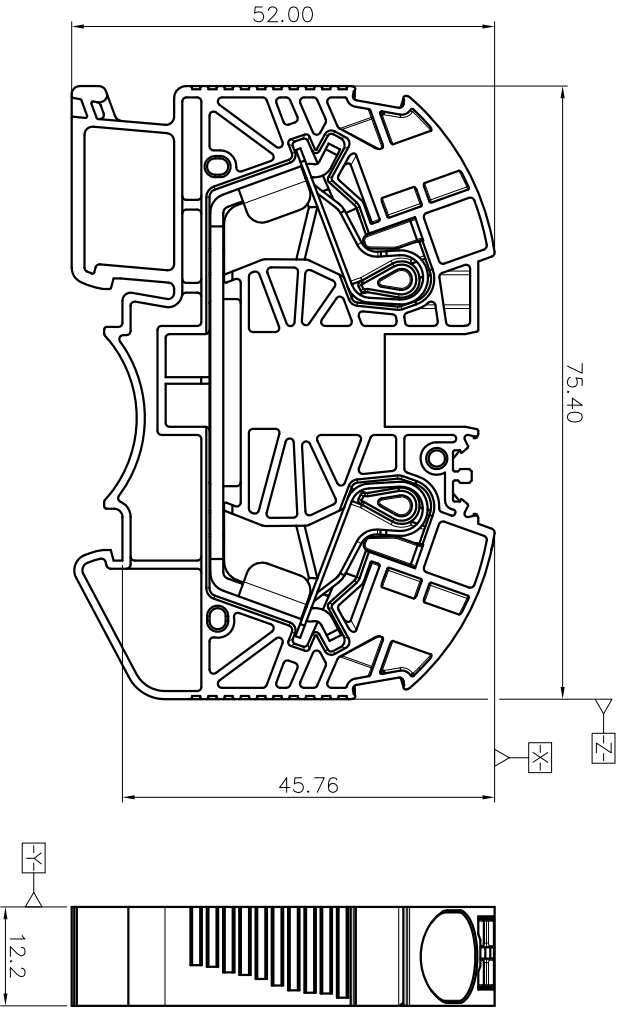

NOTES1:

- UL Standard
- 1. Rated voltage/current : 600V / 85A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Wire range : 20~4AWG

IEC Standard

1.			
Pollution degree	3		
Over-voltage category	III		
Rate impulse voltage(KV)	8.0KV		
Rate voltage(V)	1000V		
Rate current(A)	76A		

2. Wire range : 0.5~16mm<sup>2</sup>, 25mm<sup>2</sup>(SOL)

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 12.2mm, Poles : 01P
- 3. Stripping length : 18mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range in mm	in	Nominal dimension	range	Over	Under
6	TO	30	60	100	150
10	TO	60	100	150	
24	TO	60	100	150	
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
					±2:

6. RoHS Compliance

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD.:	/	NAME:	宁波高松电子有限公司
CHKD.:	/	NAME:	DS16-01P-1Y-00A(H)
DRFT.:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

A 8

B 7

C 6

D 5

E 4

F 3

G 2

H 1