


R.F.I. Suppressors - WXE Specifications

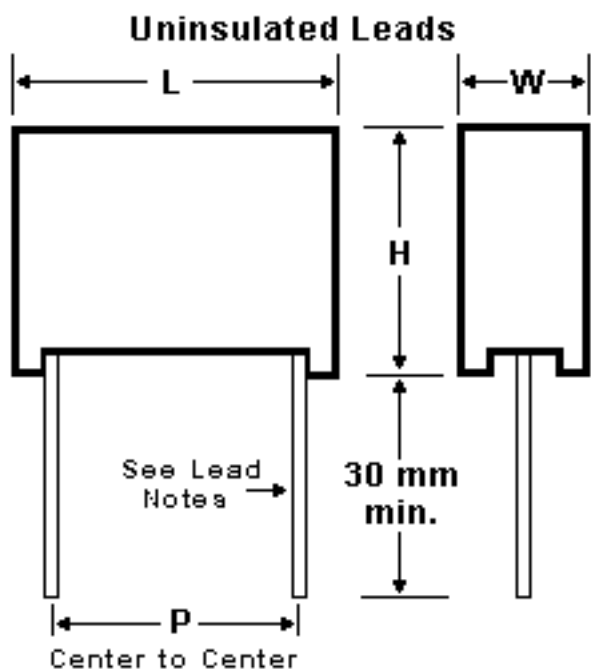

Standard Lead Lengths		
Lead cut suffixes -L04, -L05 & -L06 for 4mm, 5mm, 6mm ± 1 mm lead lengths respectively	6mm ± 1 mm short leads	Solid uninsulated wire $\phi = 0.8$ mm
Standard	35mm ± 5 mm long leads	Solid uninsulated wire $\phi = 0.8$ mm

Note: WXE Series will only be available for shipment through 6/1/2004 as it is obsoleted in favor of WXP Series.

WXE Specifications

Part Number	Cap. (μ F)	L max mm	H max mm	W max mm	P ± 0.5 mm	Quantity Per Box	
						Long Lead 30-35mm	Short Lead 4, 5, 6mm
WXE-103K	0.010	18.0	10.5	5.5	15.0	500	1300
WXE-153K	0.015	18.0	10.5	5.5	15.0	500	1300
WXE-223K	0.022	18.0	10.5	5.5	15.0	500	1300
WXE-333K	0.033	18.0	10.5	5.5	15.0	500	1300
WXE-473K	0.047	18.0	12.5	6.5	15.0	400	950
WXE-683K	0.068	18.0	13.5	7.5	15.0	400	750
WXE-104K	0.100	18.0	14.5	8.5	15.0	400	650
WXE-154K	0.150	26.5	15.5	7.5	22.5	200	480
WXE-224K	0.220	26.5	16.5	8.5	22.5	200	400
WXE-334K	0.330	26.5	18.5	10.5	22.5	150	330
WXE-474K	0.470	31.5	20.5	11.5	27.5 *	100	220
WXE-684K	0.680	31.5	23.5	13.5	27.5 *	100	150
WXE-105K	1.000	31.5	24.5	15.0	27.5 *	80	140
WXE-155K	1.500	41.5	28.5	16.0	37.5 *	40	80
WXE-225K	2.200	41.5	33.0	18.0	37.5 *	40	80

* = These parts are ± 0.7 mm.

dv/dt up to 0.1 μ F = 300v/ μ s

dv/dt 0.15 μ F to 0.68 μ F = 150v/ μ s

dv/dt 1.0 μ F to 2.2 μ F = 100v/ μ s