PBM16

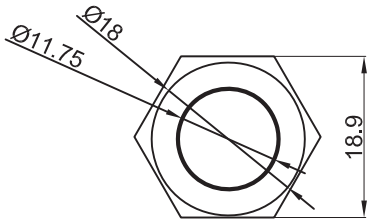

Rating: 3A 250VAC ;
Contact Resistance: 50mΩ Max. ;
Dielectric Strength:2000VAC For 1 minute ;
Total Travel: 1.5± 0.5mm ;
Operating Force:600± 200gf ;
Operating Life:50,000 cycles ;
Operating Temperation:-20° C~70° C ;
Function: OFF-(ON)







CUT-OUT



Panel Thinkness: 6mm MAX.

MATERIAL:

Actuator: SUS ;
Top Base: SUS ;
Buttom Base:PBT, UL rated:94V-0 Min. ;
Terminal: Brass,Silver or Gold plated.;
Nut: Brass, Ni plated .

REVISION	DESCRIPION	REVISED BY	TOLEANCES .X .XX ANGLE ½°					UNIT	mm	PART NAME	SPEC DRAWING	DWG NO
4			DRAWN BY	張俊雄	DESIGNED BY	王豐文	SCALE					WS2509A
3												
2			CHECKED BY	Jimmy	APPROVED BY		DATE	2014.07.29		PART NO	PBM16-11M-RS-NNN-S5-S	
1 2014.07.29	首次出圖	張俊雄										