




CONNECTORS MANUFACTURER

Pin Header 2.54mm Straight / Stack Straight / Kinked / Press Fit Type








Specifications
 Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material
 Insulator: P.B.T or Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

ORDER INFORMATION

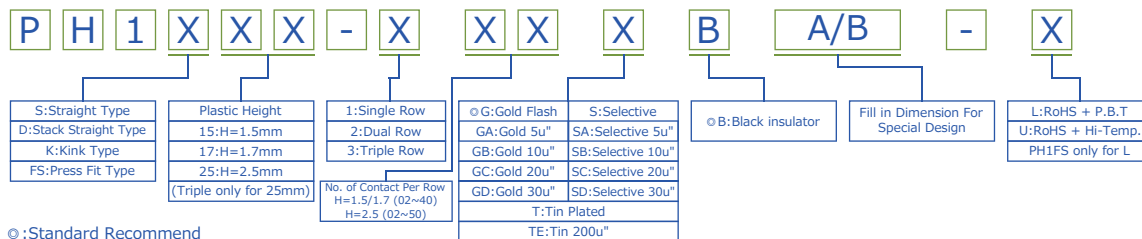


Pin Header 2.54mm 1 & 2 & 3 Row H=1.5/1.7/2.5mm Straight Type

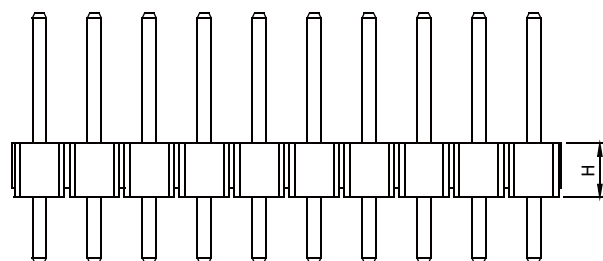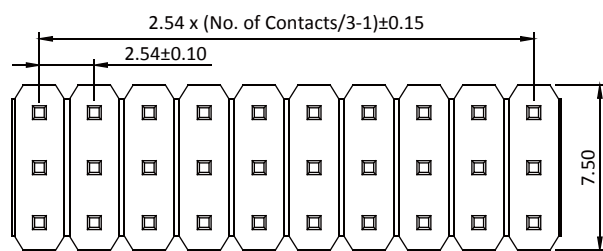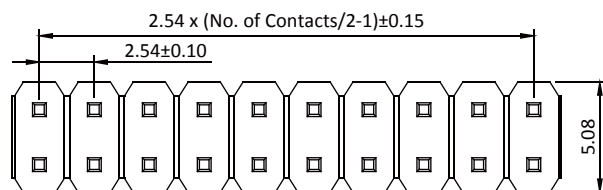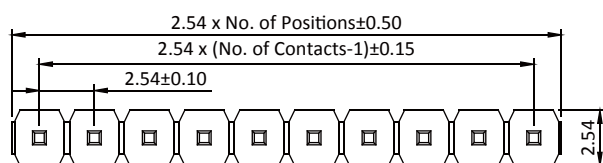

⊙: Standard Dimensions

Total length	Dim.A	Dim.B
11.60	6.00	3.00
13.90	8.10	3.30

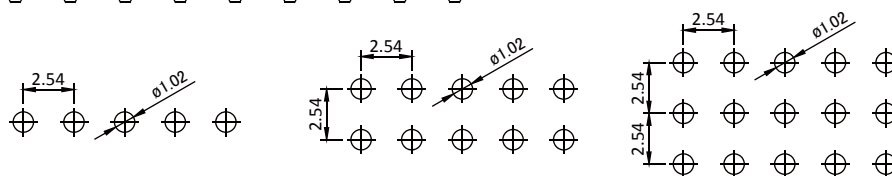

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.: PH1S15/17/25-1/2/3XX-L/U

Pin Header 2.54mm



ROHS

COMMERCIAL MANUFACTURING