

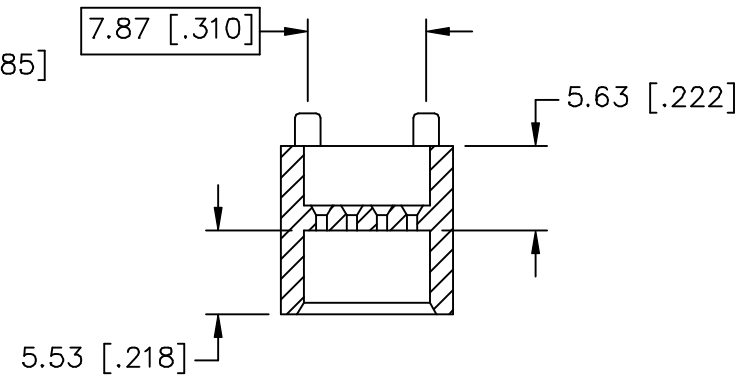


Rev	Description	Date	By
A	INITIAL RELEASE	09/13/06	KM

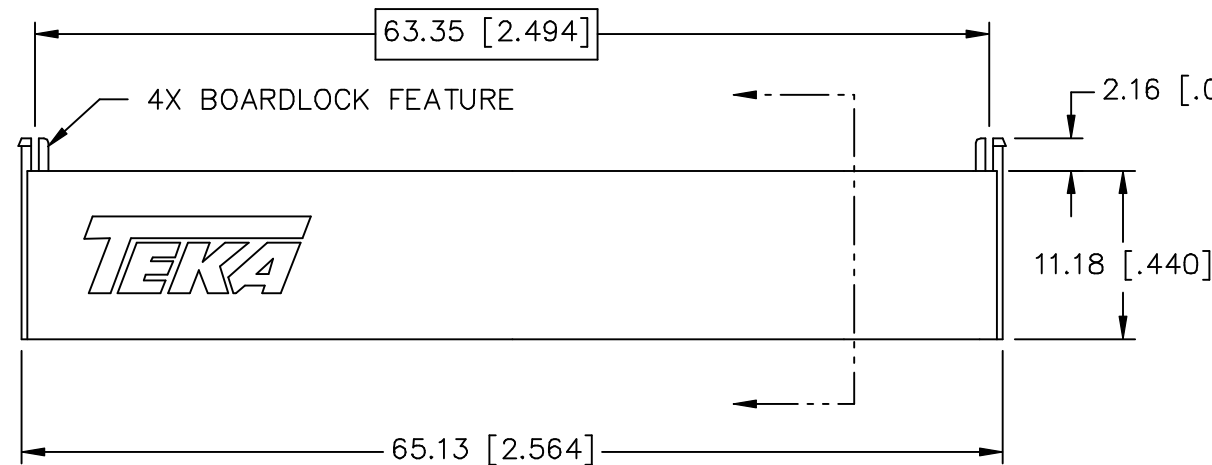


- NOTES: UNLESS OTHERWISE SPECIFIED
- 1 INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M-1994
  - 2 THIS PRODUCT CONFORMS TO ALL APPLICABLE PC/104-PLUS CONNECTOR SPECIFICATIONS
  - 3 FOR OTHER SIZES, FINISHES OR ADDITIONAL DATA CONTACT TEKA'S CUSTOMER SERVICE DEPARTMENT


**MATERIAL:** HIGH TEMPERATURE THERMOPLASTIC  
 UL RATED 94-V0

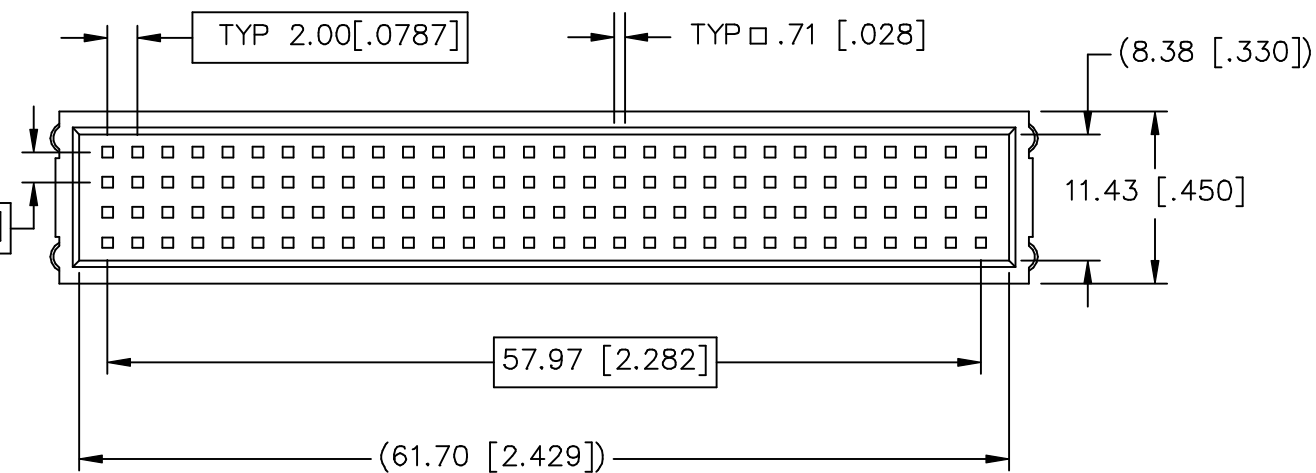

(120X  $\phi 0.84 \pm 0.08$  [ $\phi 0.033 \pm 0.003$ ] PLATED THROUGH HOLES)  
 FOR USE WITH PC/104-PLUS CONNECTOR - SEE TEKA  
 P/N PC430P-A-1-\_-\_-

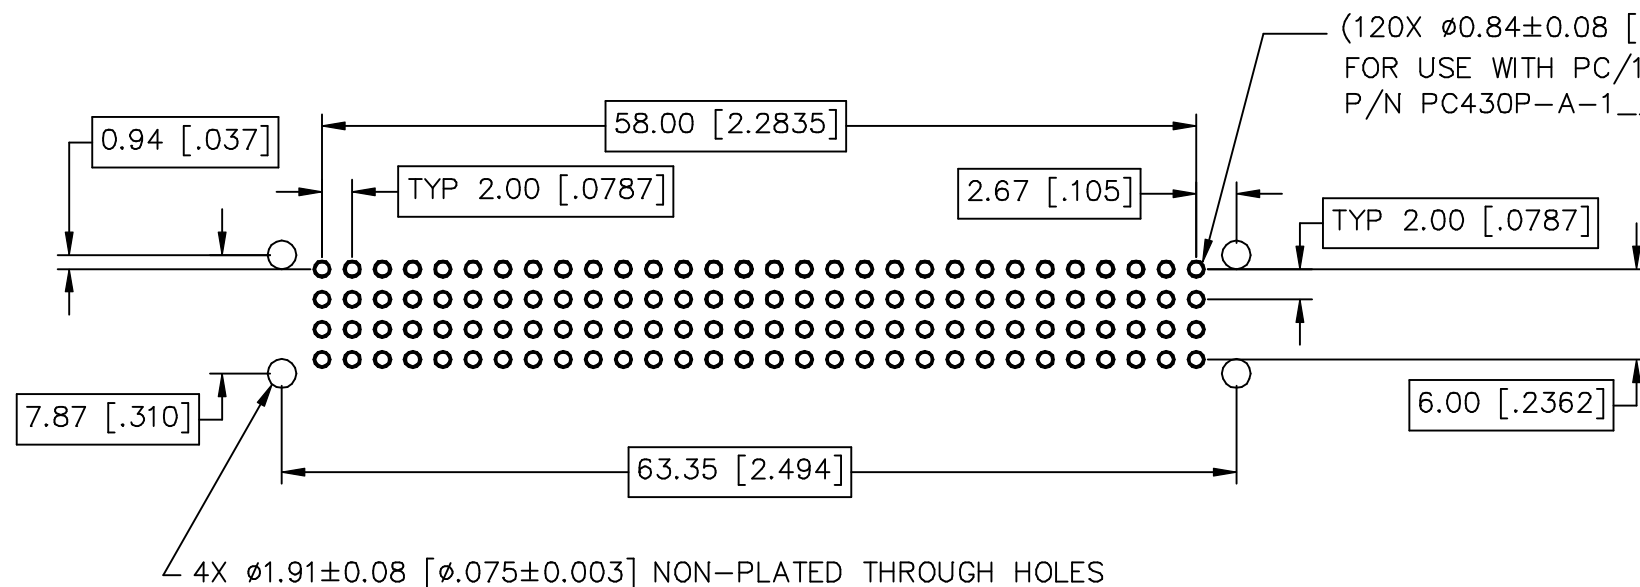

RECOMMENDED PCB LAYOUT- $1.58 \pm 0.18$  [ $.062 \pm .007$ ] THICK

Unless otherwise specified: All dimensions are: mm [Inches]	Drawn by: V. SHABACHEVICH	Date: 12/12/00	 AN INTERPLEX INDUSTRIES CO. 100 PIONEER AVE WARWICK, R.I. 02888 TEL: (401) 785-4110 FAX: (401) 781-5730 E-MAIL: sales@tekais.com
	Checked by: JSC		
-Tolerances-	Title: PC/104-PLUS CONNECTOR SHROUD ROHS COMPLIANT		Part No: PC104P-SHRD-A
No of places	MM	[IN]	Ref No: S20336
one	$\pm 0.5$	$\pm 0.02$	Scale: 2:1
two	$\pm 0.25$	$\pm 0.010$	Sheet 1 of 1
three	$\pm 0.10$	$\pm 0.004$	
Angular	$\pm 5^\circ$		