


2.00mm

(0.079") PITCH CONNECTOR

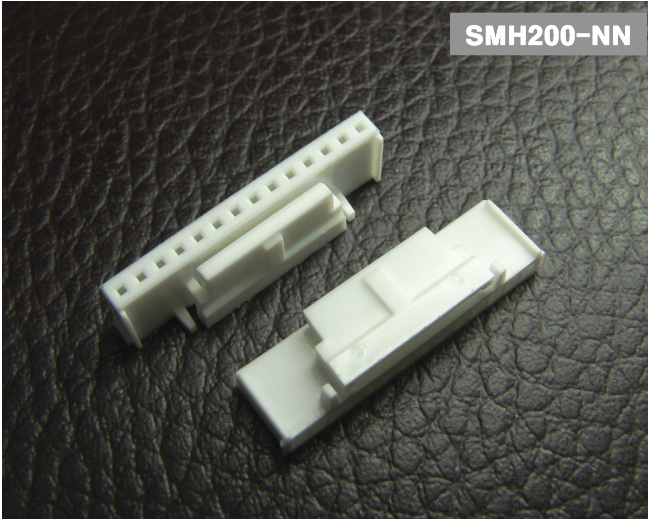

Material


I/NO	DESCRIPTION	MATERIAL
1	HOUSING	NYLON 66, UL94V-0

**Wire to Board
Connectors**

Housing

Available Pin

PARTS NO.	A	B	C
SMH200-02	5.6	4.6	2.0
SMH200-03	7.6	6.6	4.0
SMH200-04	9.6	8.6	6.0
SMH200-05	11.6	10.6	8.0
SMH200-06	13.6	12.6	10.0
SMH200-07	15.6	14.6	12.0
SMH200-08	17.6	16.6	14.0
SMH200-09	19.6	18.6	16.0
SMH200-10	21.6	20.6	18.0
SMH200-11	23.6	22.6	20.0
SMH200-12	25.6	24.6	22.0
SMH200-13	27.6	26.6	24.0
SMH200-14	29.6	28.6	26.0
SMH200-15	31.6	30.6	28.0

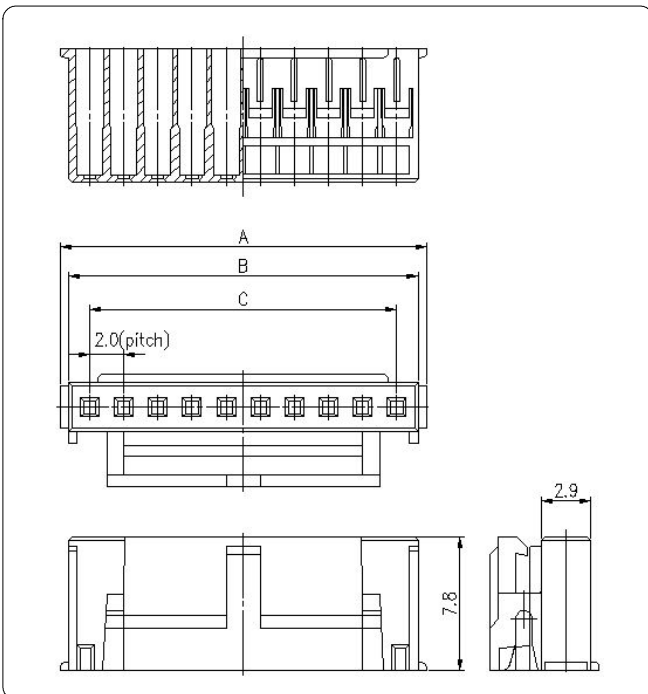

Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 3A
Operating Temperature	-25°C ~ +85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC1000V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	AWG #22~#28
Applicable P.C.B	-
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	E108706

◆ *Applicable Terminal : YST200*

