






MLF2012C680KT000

Applications		Commercial Grade
Feature		Multilayer
		Magnetic Shield
		Ferrite Core
Series	MLF Series / MLF2012 Type	
Status	Production	




Size	
Length(L)	2.00mm +/-0.20mm
Width(W)	1.25mm +/-0.20mm
Thickness(T)	1.25mm +/-0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.

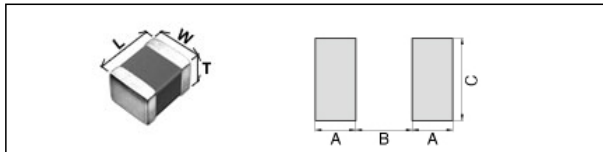Electrical Characteristics	
Inductance	68uH +/-10% at 1MHz
Rated Current	2mA
Self-Resonant Frequency [Min.]	9MHz
Self-Resonant Frequency [Typ.]	16MHz
Q [Min.]	25 at 1MHz
Q [Typ.]	45 at 1MHz
DC Resistance [Nom.]	2Ω
DC Resistance [Max.]	2.9Ω


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 85degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000Pcs Min.
Weight	0.014g

MLF2012C680KT000


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

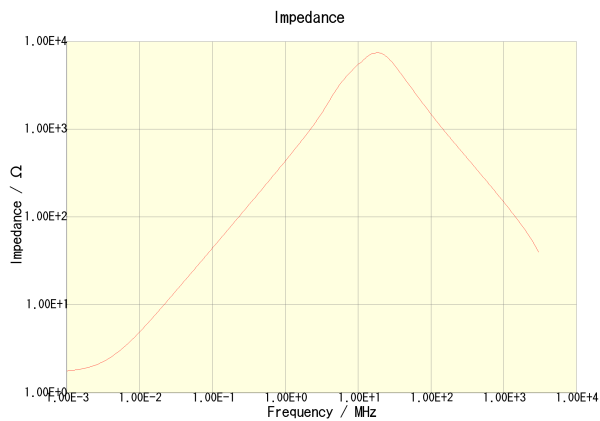


MLF2012C680KT000

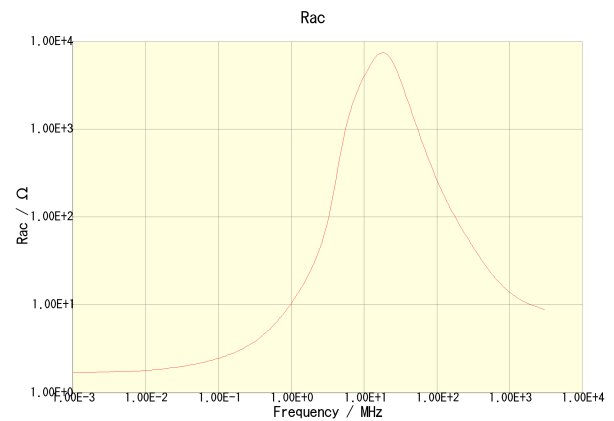

MLF2012C680KT000

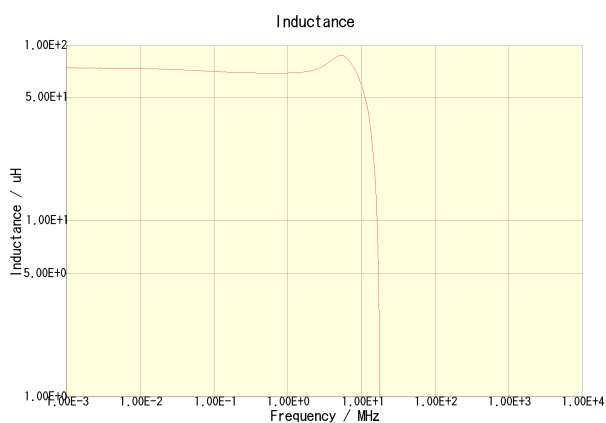




MLF2012C680KT000

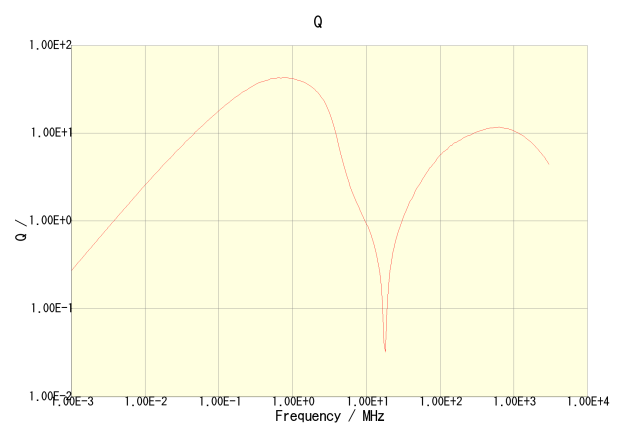

MLF2012C680KT000

MLF2012C680KT000

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

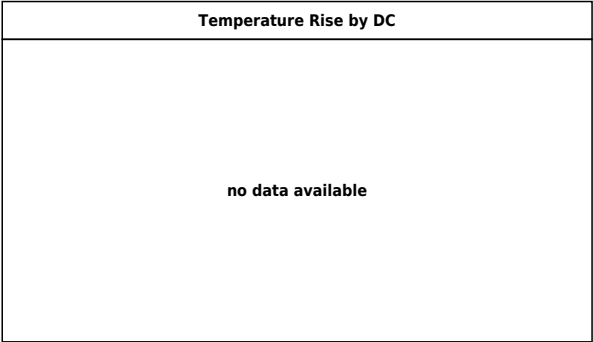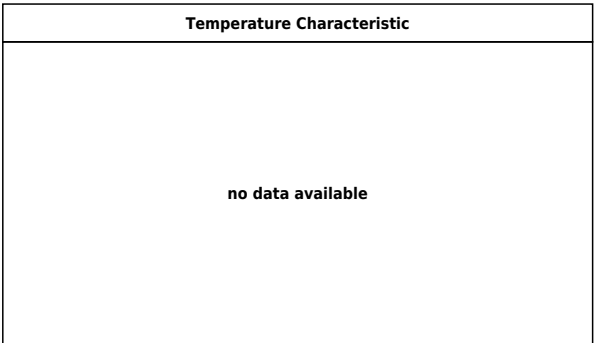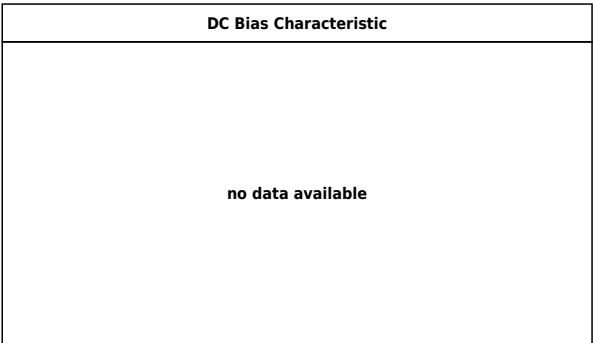

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.